


Lances with ST-54.3 Variopress



The choice of perfection

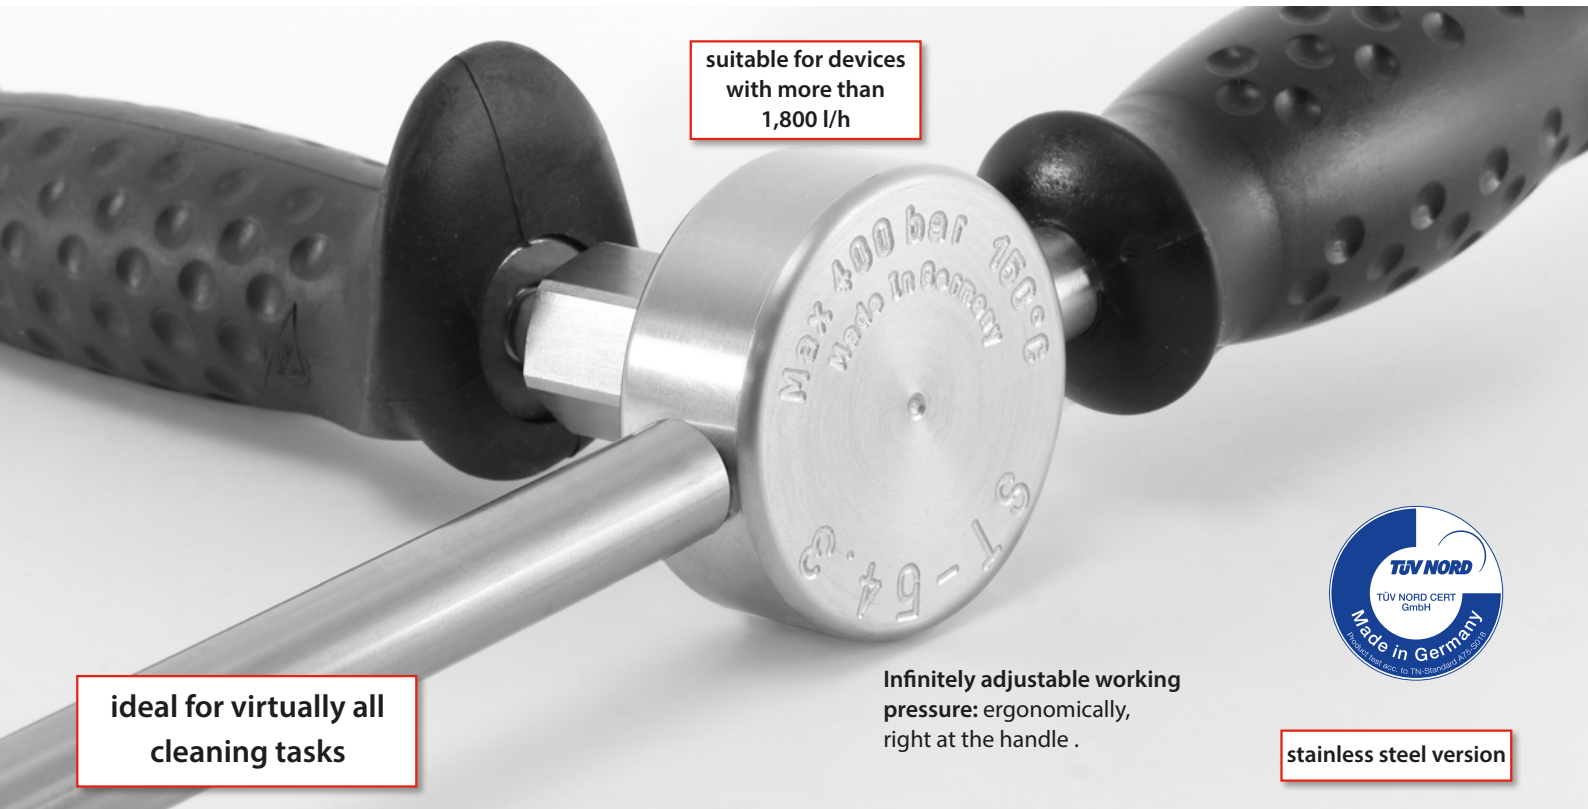

suitable for devices
with more than
1,800 l/h

ideal for virtually all
cleaning tasks

Infinitely adjustable working
pressure: ergonomically,
right at the handle .



stainless steel version

Professional stainless steel pressure regulation lance

- for accurate regulation of water quantity and pressure directly on the side handle
- ideal for virtually all cleaning tasks
- easy handling, ergonomic side handle
- stainless steel version
- with molded lance Cool & Compact ST-29
- max. pressure: 400 bar, 5,800 psi
- max. temperature: 150 °C
- max. flow: 45 litres

Ergonomic:
handle-safe and robust
design for the
durable, professional use.

The connection options:

- 1/4" F
- Plug KW
- M22 M
- M22 F
- M22 F swivel
- Plug ST-247

Safe and easy handling: simply turn for perfect regulation.



In good shape: Stainless steel valve with engraved technical data



Pressure regulation valve
1/4" F

R+M Nr.
710 054 454



Insulation ST-29
Cool & Compact

Technical data


Max. pressure / temperature	400 bar, 5,800 psi / 150 °C
Max. flow	45 l
Nozzle protector	ST-10 / tip nozzle holder / hydroblade® without nozzles
Length	1,200 mm
Outlet	nozzle holder EG / 1/4" F NPT / hydroblade® nozzle protector
Material valve and lance	stainless steel

Lances with ST-54.3 Variopress




The choice of perfection

Lance with valve ST-54.3 aside suitable for devices with more than 1,800 l/h

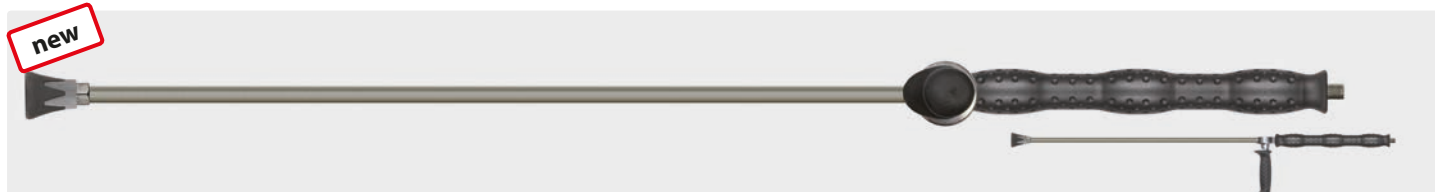


R+M Nr.	Outlet	Insulation	Length	Material
517 054 700	1/4" IG NPT	300 mm	800 mm	stainless steel

1/4" M. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and nozzle protector ST-10 without nozzle. Max. 400 bar / 150 °C

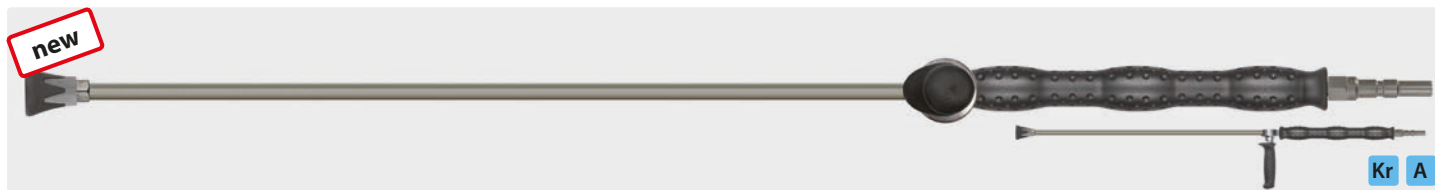


R+M Nr.	Outlet	Insulation	Length	Material
517 054 730	1/4" F NPT	300 mm	800 mm	stainless steel

Plug KW. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and nozzle protector ST-10 without nozzle. Max. 400 bar / 150 °C

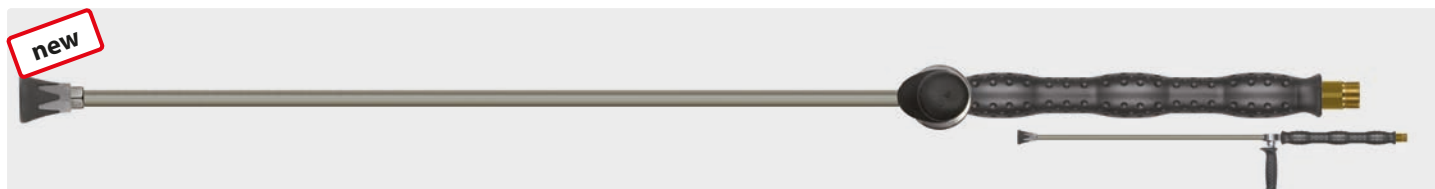


R+M Nr.	Outlet	Insulation	Length	Material
517 054 710	1/4" F NPT	300 mm	800 mm	stainless steel

M22 M. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and nozzle protector ST-10 without nozzle. Max. 400 bar / 150 °C

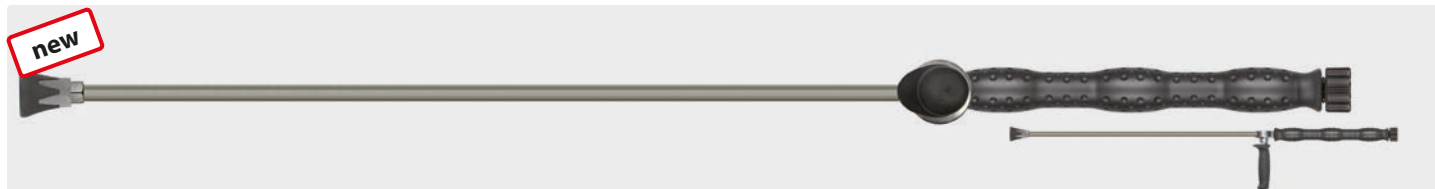


R+M Nr.	Outlet	Insulation	Length	Material
517 054 720	1/4" F NPT	300 mm	800 mm	stainless steel

M22 F. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and nozzle protector ST-10 without nozzle. Max. 400 bar / 150 °C

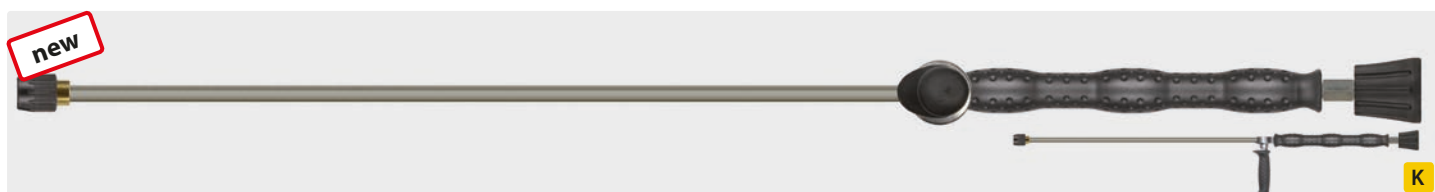

R+M Nr.	Outlet	Insulation	Length	Material
517 054 740	tip nozzle holder	300 mm	800 mm	stainless steel

M22 F swivel. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and nozzle protector without tip. Max. 400 bar / 150 °C

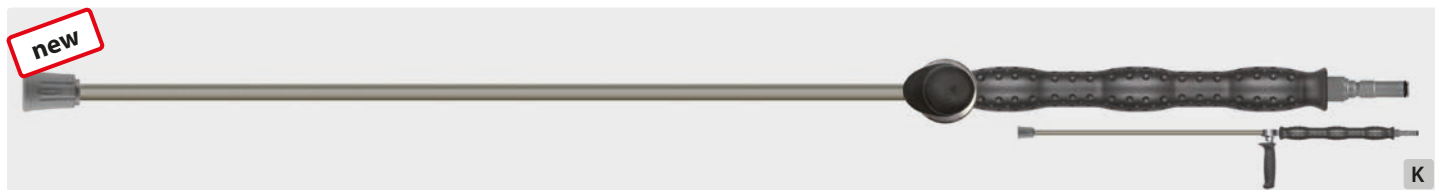

R+M Nr.	hydroblade® outlet	Insulation	Length	Material
517 054 750	nozzle protector	300 mm	800 mm	stainless steel

Plug ST-247. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and hydroblade® nozzle protector without hydroblade® nozzles. Max. 400 bar / 150 °C