

PURClean365+® High pressure hoses for the food industry, PVC




The choice of perfection

Ideal field of application:
food and
beverage industry




Assembled with
stainless steel
fittings



The PVC high pressure hoses PURClean365+ 40 and PURClean365+ 100 for hygienic application in the food - and beverage industry

- Especially developed to meet highest requirements to hygiene and ergonomics
- Excellent ease of use
- Smooth, stain and grease resistant, surface
- Premium fabric inlays made of rot-proof synthetic fibre
- Conform to EG-regulation Nr. 1935/2004 and Nr. 10/2011

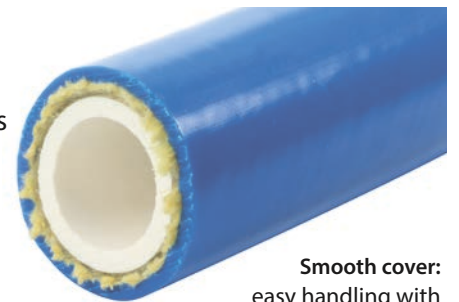


Smooth cover:
easy handling with
best sliding characteristics


Technical data PURClean365+® 40




R+M Nr.	DN	⊘		⊘ +/- mm		⊘ +/- mm		⊘	⊘
		inch	mm	mm	inch	mm	mm		
303 660 40	12	0.49	12.5	0.3	0.85	21.6	0.5	0.3	4,5

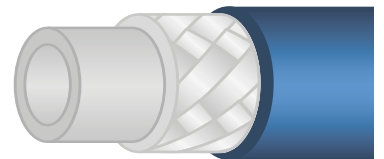

Composition:
surface made out of thermoplastic
elastomer, fabric inlay of synthetic
fibre and PES

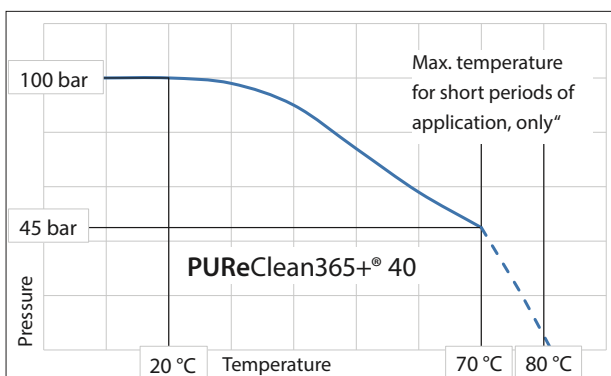

°C	P		BP	
	20	70	20	70
bar	100	45	=>250	110



PURClean365+® High pressure hoses for the food industry, PVC



The choice of perfection

PURClean365+ 40

Female thread DKR

1/2" : 1/2"



Fittings stainless steel

R+M Nr.	↔
476 056 602 59	2.5 m
476 056 610 9	10.0 m
476 056 615 9	15.0 m
476 056 620 9	20.0 m
476 056 625 9	25.0 m
476 056 630 9	30.0 m
476 056 635 9	35.0 m
476 056 640 9	40.0 m

Male thread (AGR)


1/2" : 1/2"




Fittings stainless steel

R+M Nr.	↔
476 046 602 59	2.5 m
476 046 610 9	10.0 m
476 046 615 9	15.0 m
476 046 620 9	20.0 m
476 046 625 9	25.0 m
476 046 630 9	30.0 m
476 046 635 9	35.0 m
476 046 640 9	40.0 m

Technical data PURClean365+® 100



R+M Nr.	DN	⊘		⊘	⊘		⊞	⊞	
		inch	mm	+/- mm	inch	mm			
303 661 00	12	0.49	12.5	0.3	0.85	21.6	0.5	0.3	4.5

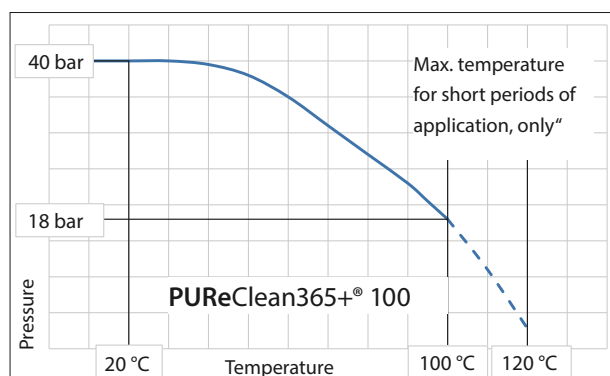

	[P]		[BP]	
°C	20	100	20	100
bar	40	18	=>250	50



PURClean365+ 100

Female thread DKR

1/2" : 1/2"



Fittings stainless steel

R+M Nr.	↔
477 056 602 59	2.5 m
477 056 610 9	10.0 m
477 056 615 9	15.0 m
477 056 620 9	20.0 m
477 056 625 9	25.0 m
477 056 630 9	30.0 m
477 056 635 9	35.0 m
477 056 640 9	40.0 m

Male thread (AGR)

1/2" : 1/2"



Fittings stainless steel

R+M Nr.	↔
477 046 602 59	2.5 m
477 046 610 9	10.0 m
477 046 615 9	15.0 m
477 046 620 9	20.0 m
477 046 625 9	25.0 m
477 046 630 9	30.0 m
477 046 635 9	35.0 m
477 046 640 9	40.0 m

Symbole DN nominal diameter ⊘ internal diameter ⊘ diameter ⊞ weight ⊞ wall thickness [P] pressure [BP] burst pressure