


ST-45

Low pressure quick coupling



The choice of perfection

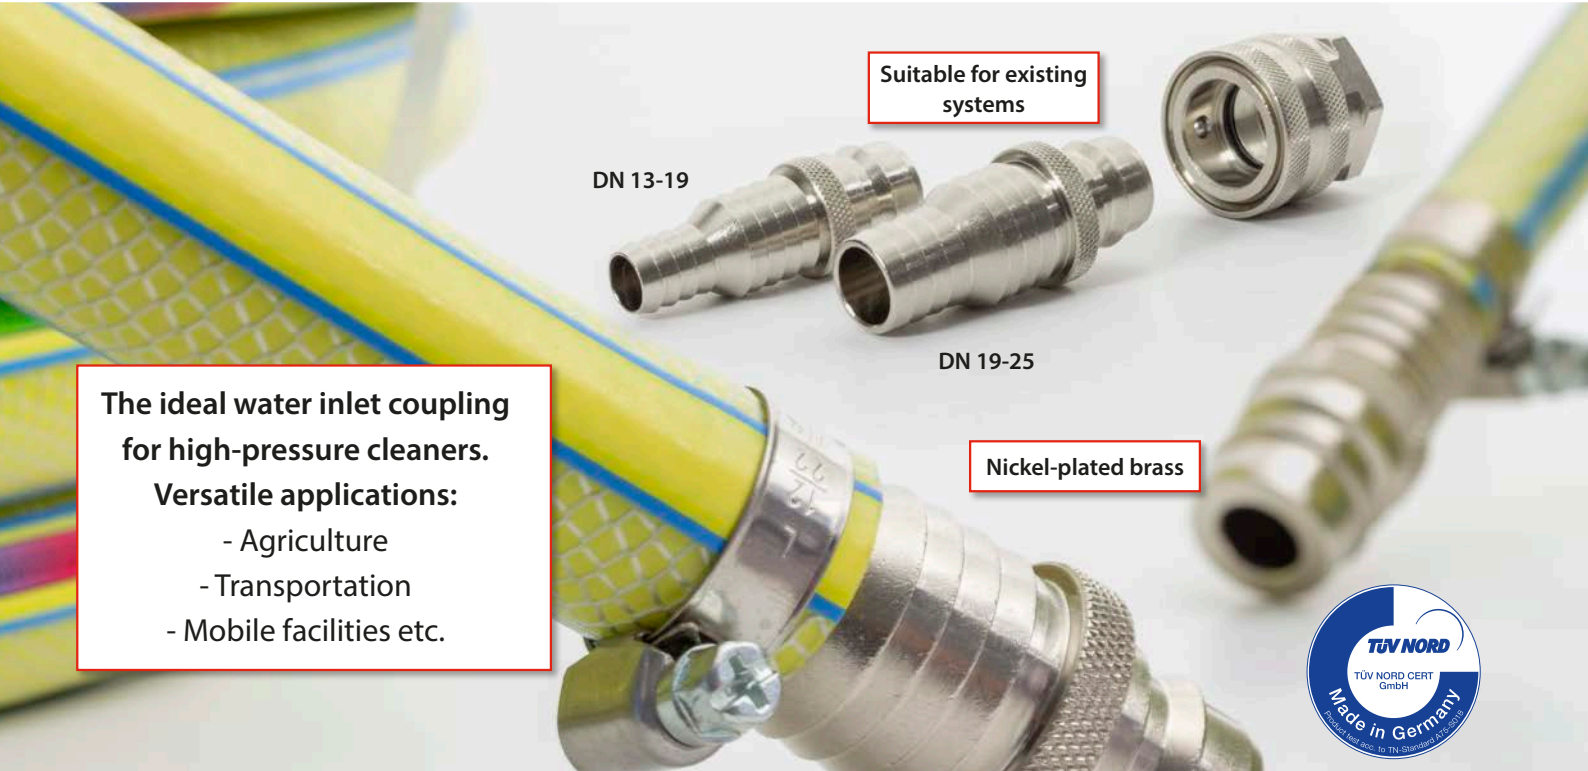

Suitable for existing systems

DN 13-19

DN 19-25

Nickel-plated brass

The ideal water inlet coupling for high-pressure cleaners. Versatile applications:

- Agriculture
- Transportation
- Mobile facilities etc.




ST-45 coupling and plug nipple for the highest demands and fast operation

- Particularly safe and durable up to a maximum of 25 bar.
- For highest demands on durability and easy, fast handling.
- Suitable for temperatures up to 80 ° C and with hoses DN 13-25.



ST-45 Plug / Hose barb for 13-25 mm.

ST-45. Quick Coupling.

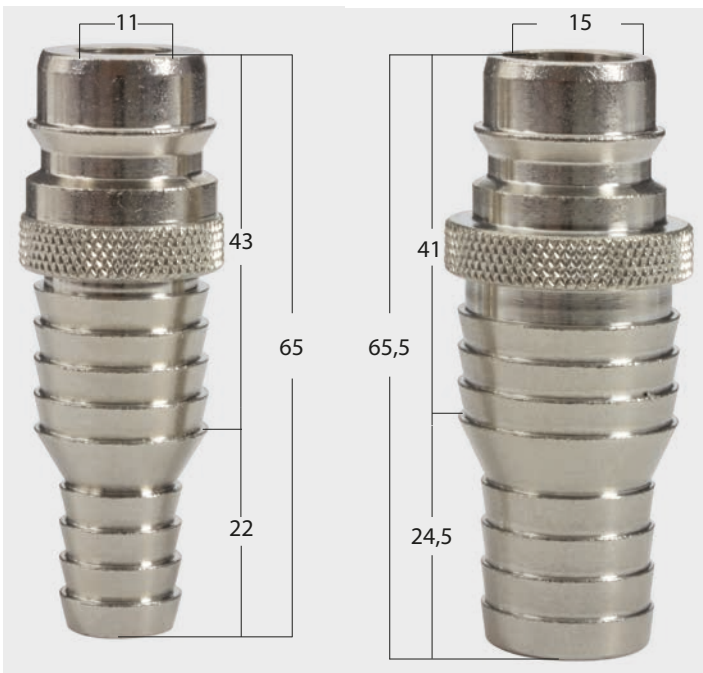

ST-45. Quick Coupling : 3/4" F

ST-45. Plug nipple with hose barb 13-19 mm

ST-45. Plug nipple with hose barb 19-25 mm

R+M Nr.	200 045 210
---------	-------------

R+M Nr.	010 000 455
---------	-------------

R+M Nr.	010 000 456
---------	-------------

Technical specifications

Model:	Quick Coupling ST-45	Plug nipple + hose barb
Max. pressure	25 bar	
Temperature	-30 °C - +80 °C	
Thread	3/4" F	-
Material	Nickel-plated brass	
ID	-	13-25