


Foodjet 1500 - High pressure hoses with textile meshwork



The choice of perfection

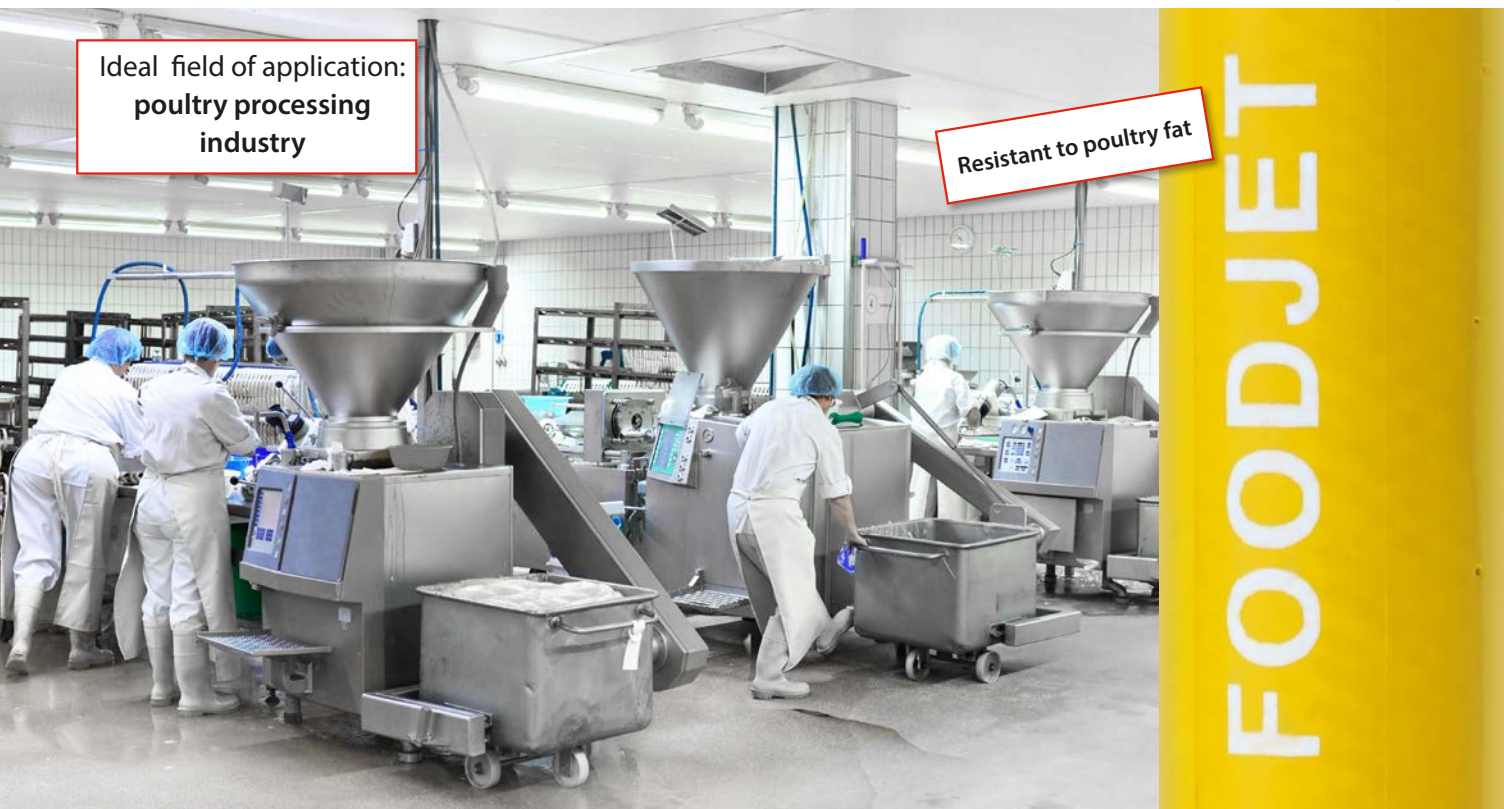


The high pressure hose for the poultry processing industry

- High pressure hose according to DIN EN 854. Particularly resistant to animal and **poultry fats**.
- Suitable for: oil, water, water-in-oil emulsion and water mixes with up to 50 % detergent.
- Surface synthetic rubber. Particularly abrasion-, oil-, ozone-resistant and weatherproof.
- Grease-, oil-, UV-, ozone-resistant and weatherproof.
- Interior synthetic, oil-resistant rubber. 3 tight textile meshwork.
- Max. 125 bar. Burst pressure > 375 bar.
- -40 °C - +150 °C.



Smooth cover:
easy application on rough floors under hardest conditions.

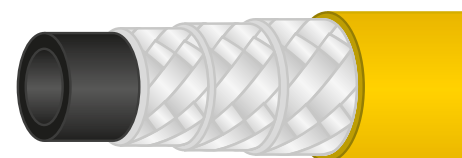

Composition: Interior synthetic, oil-resistant rubber.
3 tight textile meshwork.
Surface synthetic rubber.

Technical data

DN	size	⊙		⊘	P		BP		⤿		⊠	°C
		inch	mm		bar	psi	bar	psi	mm	inch		
12	08	1/2"	12.7	21.8	125	1,800	375	5,400	85	3.35	0.3	-40 °C - +150 °C

Symbols DN nominal diameter ⊙ internal diameter ⊘ diameter P pressure BP burst pressure ⤿ bending radius ⊠ weight °C temperature

Foodjet 1500 - High pressure hoses with textile meshwork



The choice of perfection

Female thread DKR




Male thread (AGR)

Male thread (AGR) : DKR

Foodjet per metre

1/2" : 1/2"

DN 12

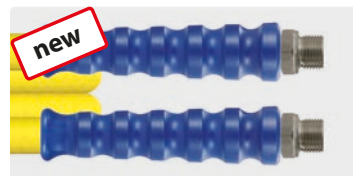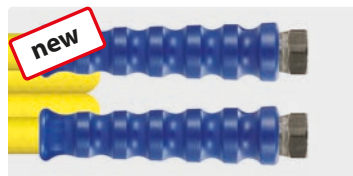

R+M Nr.	
303 601 500	70 - 100 m

Fittings stainless steel

R+M Nr.	
490 445 660 259	2.5 m
490 445 661 09	10.0 m
490 445 661 59	15.0 m
490 445 662 09	20.0 m
490 445 662 59	25.0 m
490 445 663 09	30.0 m
490 445 663 59	35.0 m
490 445 664 09	40.0 m

Fittings stainless steel

R+M Nr.	
490 444 660 259	2.5 m
490 444 661 09	10.0 m
490 444 661 59	15.0 m
490 444 662 09	20.0 m
490 444 662 59	25.0 m
490 444 663 09	30.0 m
490 444 663 59	35.0 m
490 444 664 09	40.0 m

Fittings stainless steel

R+M Nr.	
490 445 760 259	2.5 m
490 445 761 09	10.0 m
490 445 761 59	15.0 m
490 445 762 09	20.0 m
490 445 762 59	25.0 m
490 445 763 09	30.0 m
490 445 763 59	35.0 m
490 445 764 09	40.0 m

Fittings zinc-plated steel

R+M Nr.	
490 445 660 25	2.5 m
490 445 661 0	10.0 m
490 445 661 5	15.0 m
490 445 662 0	20.0 m
490 445 662 5	25.0 m
490 445 663 0	30.0 m
490 445 663 5	35.0 m
490 445 664 0	40.0 m

Fittings zinc-plated steel

R+M Nr.	
490 444 660 25	2.5 m
490 444 661 0	10.0 m
490 444 661 5	15.0 m
490 444 662 0	20.0 m
490 444 662 5	25.0 m
490 444 663 0	30.0 m
490 444 663 5	35.0 m
490 444 664 0	40.0 m

Fittings zinc-plated steel

R+M Nr.	
490 445 760 25	2.5 m
490 445 761 0	10.0 m
490 445 761 5	15.0 m
490 445 762 0	20.0 m
490 445 762 5	25.0 m
490 445 763 0	30.0 m
490 445 763 5	35.0 m
490 445 764 0	40.0 m