

Ideal field of application:
**food and
 beverage industry,
 fish farming and
 swimming pools**



Assembled with
 stainless steel
 fittings


The high pressure hose for the food industry and swimming pools

- Especially developed to meet highest requirements to hygiene and ergonomics
- Excellent ease of use, extremely light weight and flexible in case of low temperatures
- Smooth and stain-resistant surface made out of thermoplastic elastomer
- Ideal for the use on rough floors due to high abrasion resistance
- Grease-, oil-, UV-, ozone-resistant and weatherproof
- Brass-plated wire braid
- Suitable for working pressures of max. 275 bar
- -40 °C - +120°C



Smooth cover:
 easy application on rough
 floors under hardest conditions

Composition: surface made out of thermoplastic elastomer, brass-plated wire braid, fabric braid and PES-interior

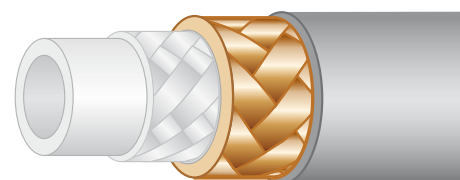

Technical data

DN	size	⊘		⊘	P		BP		⤿		⊞	°C
		inch	mm		bar	psi	bar	psi	mm	inch		
10	06	3/8"	9.7	17.4	275	4,000	1,100	15,954	130	5.1	0.3	-40 °C - +120 °C

Symbols DN nominal diameter ⊘ internal diameter ⊘ diameter P pressure BP burst pressure ⤿ bending radius ⊞ weight °C temperature

Flexibles haute-pression „greyflex“



The choice of perfection

Male thread (AGR)	Female thread (DKR)	Male thread (AGR)	AGR : DKR	AGR : DKR
3/8" : 3/8"	3/8" : 3/8"	1/2" : 1/2"	3/8" : 3/8"	1/2" : 1/2"
Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel



R+M Nr.		
352 201 445 109	10 m	
352 201 445 159	15 m	
352 201 445 209	20 m	
352 201 445 259	25 m	
352 201 445 309	30 m	

R+M Nr.		
352 201 545 109	10 m	
352 201 545 159	15 m	
352 201 545 209	20 m	
352 201 545 259	25 m	
352 201 545 309	30 m	

R+M Nr.		
352 201 465 109	10 m	
352 201 465 159	15 m	
352 201 465 209	20 m	
352 201 465 259	25 m	
352 201 465 309	30 m	

R+M Nr.		
352 201 555 109	10 m	
352 201 555 159	15 m	
352 201 555 209	20 m	
352 201 555 259	25 m	
352 201 555 309	30 m	

R+M Nr.		
352 201 578 109	10 m	
352 201 578 159	15 m	
352 201 578 209	20 m	
352 201 578 259	25 m	
352 201 578 309	30 m	

Quick screw couplings	QSC : plug swivel
M22 : M22	M22 : \varnothing 11 swivel
Stainless steel	Stainless steel



R+M Nr.		
352 201 005 109	10 m	
352 201 005 159	15 m	
352 201 005 209	20 m	
352 201 005 259	25 m	
352 201 005 309	30 m	

R+M Nr.		
352 201 115 109	10 m	
352 201 115 159	15 m	
352 201 115 209	20 m	
352 201 115 259	25 m	
352 201 115 309	30 m	