

Quick screw couplings


Quick screw coupling : male thread



Standard M22 : M. Black.
Max. 400 bar / 150 °C



Standard M21 : M. Grey.
Max. 400 bar / 150 °C

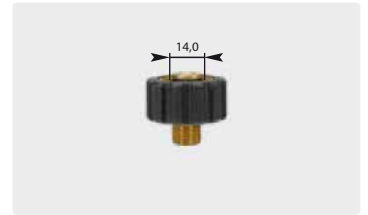

Short M22 : M. Black.
Max. 400 bar / 150 °C

AG	
1/4"	
3/8"	
1/2"	
M14	
M16	
M18	
M21	
M22	

R+M Nr.	i
561 40	49 mm
561 60	46 mm
561 66	50 mm
561 70	51 mm
561 80	51 mm
561 90	47 mm
561 98	49 mm
561 95	60 mm

R+M Nr.	i
564 20	44 mm
564 40	45 mm
564 50	43 mm
564 62	49 mm
564 60	60 mm

R+M Nr.	i
560 30	28 mm



Short M21 : M. Grey.
Max. 400 bar / 150 °C



Short M22 : M. Stainless steel.
Max. 400 bar / 150 °C



Short PG 13.5 : M.
Max. 400 bar / 150 °C

AG	
1/4"	

R+M Nr.	i
563 20	27 mm

R+M Nr.	i
560 39	28 mm

R+M Nr.	i
560 60	28 mm




M22 : M. Stainless steel. Max. 500 bar


AG	
1/4"	
3/8"	

R+M Nr.	i
561 49	48 mm
561 69	45 mm


Quick screw coupling : quick screw coupling

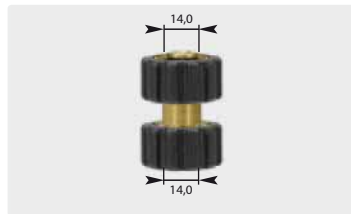

M22 F : M22 F.
Max. 400 bar / 150 °C



M22 F : M21 F.
Max. 400 bar / 150 °C

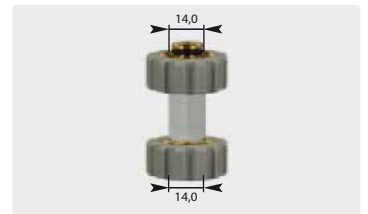

M21 F : M21 F.
Max. 400 bar / 150 °C

⊙	

R+M Nr.	i
561 96	50 mm

R+M Nr.	i
561 97	50 mm

R+M Nr.	i
564 65	65 mm