

## Handverschraubungen

### Handverschraubung : Innengewinde



Standard M22 : IG. Schwarz.  
Max. 400 bar / 150 °C


R+M Nr.	Höhe (mm)
561 20	45 mm
561 30	45 mm
561 50	45 mm
561 65	45 mm

IG
1/8"
1/4"
3/8"
1/2"



Standard M21: IG. Grau.  
Max. 400 bar / 150 °C

R+M Nr.	Höhe (mm)
564 00	42 mm
564 10	41 mm
564 30	41 mm

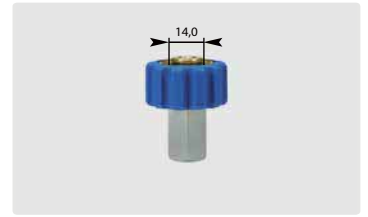

Standard 1/2" : IG. Blau.  
Max. 400 bar / 150 °C

R+M Nr.	Höhe (mm)
561 10	43 mm



Kurz M22 : IG. Schwarz.  
Max. 400 bar / 150 °C

R+M Nr.	Höhe (mm)
560 10	31 mm
560 20	28 mm

IG
1/8"
1/4"
3/8"



M22 : IG. Edelstahl.  
Max. 500 bar

R+M Nr.	Höhe (mm)
561 39	45 mm
561 59	45 mm

### Ersatzdichtungen



O-Ring. 10x2,2. Viton

R+M Nr.	VPE
790 24	1
790 241 00	100



Stützring

R+M Nr.	VPE
050 001 440	1
787 001 100	100



O-Ring. 10x2. Perbunan

R+M Nr.	VPE
790 10	1
790 100	100



O-Ring. 10x2. Viton

R+M Nr.	VPE
790 20	1
790 201 00	100



O-Ring. 10x2,2. Perbunan

R+M Nr.	VPE
790 25	1
790 251 00	100

Symbole Gewinde Innengewinde Außengewinde Höhe Verpackungseinheit