


Quick screw couplings suitable for system 2000



M22 F : M. Max. 400 bar / 150 °C

K



M22 F : F. Max. 400 bar / 150 °C

K



M22 F : M. Max. 400 bar / 150 °C

K

	1/4"
--	------

R+M Nr.	
560 302	30 mm

R+M Nr.	
561 302	45 mm

R+M Nr.	
561 402	49 mm



M22 F : F. Max. 400 bar / 150 °C

K



M22 F : M. Max. 400 bar / 150 °C

K

	3/8"
--	------

R+M Nr.	
561 502	47 mm

R+M Nr.	
561 602	50 mm

Quick screw couplings US


Quick screw couplings US

Seal



M22 F : F.
Max. 400 bar / 150 °C

new



M22 : F.
Max. 400 bar / 150 °C

new



O-ring. Quick screw coupling US.
10.77x2.62. NBR 70


new

	3/8" F
--	--------

R+M Nr.	
561 501	45 mm


R+M Nr.	
565 402	29

R+M Nr.	
903 825 00	

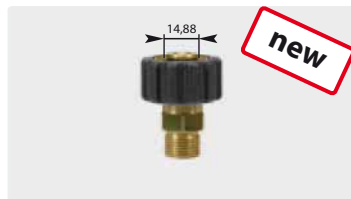

M22 F : F.
Max. 400 bar / 150 °C

new



M22 : M.
Max. 400 bar / 150 °C

new

	1/4" M
	3/8" M

R+M Nr.	
561 601	46 mm

R+M Nr.	
565 302	29

Symbols height thread