

Suttner Höchstdruckschnellkupplungen ST-45-600

Kupplungen und Stecknippel ST-45-600



Kupplung : AG. Edelstahl.
Max. 600 bar / 150 °C

⊙	DN	R+M Nr.	I
1/4"	8	200 045 600	57 mm



O-Ring, 11x1,5

R+M Nr.
050 000 020




Kupplung : AG. Edelstahl.
Max. 600 bar / 150 °C

⊙	R+M Nr.	I
	200 045 605	57 mm



Stützring, 11x14x1

R+M Nr.
050 001 430

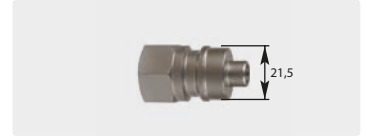

Stecknippel : IG. Gehärteter
Edelstahl. Max. 600 bar / 150 °C

⊙	R+M Nr.	I
	040 005 468	40 mm



O-Ring, 10x2,5

R+M Nr.
050 000 160


Suttner Hochdruckschnellkupplungen ST-246

Kupplung und Stecknippel ST-246-8




Kupplung : IG. Edelstahl.
Max. 550 bar / 100 °C

⊙	DN	R+M Nr.	I
1/2"	11	710 246 412 000	41,0 mm



Stecknippel : IG. Gehärteter
Edelstahl. Max. 550 bar / 100 °C

⊙	R+M Nr.	I
	710 246 312 001	43,7 mm

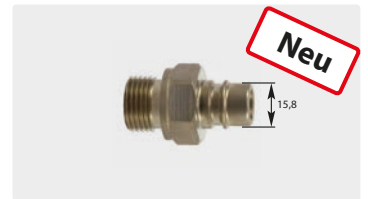

Stecknippel : AG. Gehärteter
Edelstahl. Max. 550 bar / 100 °C


⊙	R+M Nr.	I
	710 246 312 001	45,2 mm

Kupplung und Stecknippel ST-246-6



Kupplung : IG. Edelstahl.
Max. 550 bar / 100 °C

⊙	DN	R+M Nr.	I
3/8"	8,5	710 246 238 000	37,8 mm



Stecknippel : IG. Gehärteter
Edelstahl. Max. 550 bar / 100 °C

⊙	R+M Nr.	I
	710 246 138 001	36,6 mm

Stangendichtung



NBR 75

R+M Nr.	⊙	TYP
710 005 004	1/2"	ST-246-8
710 005 003	3/8"	ST-246-6

Dichtscheibe



Dichtscheiben. Stahl





Dichtscheiben. Edelstahl

R+M Nr.	⊙	VPE
788 881 4	1/4"	1
788 881 410 0	1/4"	100
788 883 8	3/8"	1
788 883 810 0	3/8"	100
788 881 2	1/2"	1
788 881 210 0	1/2"	100
788 881	1"	1

R+M Nr.	⊙	VPE
788 881 49	1/4"	1
788 881 491 00	1/4"	100
788 883 89	3/8"	1
788 883 891 00	3/8"	100
788 881 29	1/2"	1
788 881 291 00	1/2"	100

Funktionsprinzip Dichtscheibe



Symbole I Höhe DN Nennweite ⊙ Gewinde VPE Verpackungseinheit