

ST-247 coupling system

TR22 adapters (old : new)




TR22 M : M22 F QSC. Alternative to adapter 2+3.
Brass. Max. 400 bar / 150° C.

R+M Nr.
561 022 220



TR22 M : M22 F QSC. Brass. Swivel.
Alternative to adapter 2+3.
Max. 400 bar / 150° C.

R+M Nr.
568 022 220

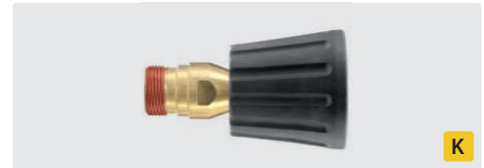

TR22 M : M 22 F QSC. Brass. Swivel.
Alternative to adapter 2+3.
Max. 400 bar / 150° C.

R+M Nr.
568 022 221



TR22 F : 3/8" F. Swivel. Brass.
Alternative to adapter 12.
Incl. 1 heat resistant cap.
Max. 400 bar / 150° C

R+M Nr.
200 301 110



TR22 F : M22 M. Swivel. Brass.
Alternative to adapter 12.
Incl. 1 heat resistant cap.
Max. 400 bar / 150° C

R+M Nr.
200 301 100



3/8" M : TR22 M.
Brass.
Max. 400 bar / 150° C.

R+M Nr.
010 003 041



TR22 F : TR22 M.
Brass.
Max. 400 bar / 150° C

R+M Nr.
200 247 250



TR22 F : 3/8" M.
Alternative to adapter 6.
Brass.
Max. 400 bar / 150° C

R+M Nr.
565 683



TR22 F : 3/8" F.
Alternative to adapter 6.
Brass.
Max. 400 bar / 150° C

R+M Nr.
565 684



TR22 F : M22 M.
Alternative to adapter 6.
Brass.
Max. 400 bar / 150° C

R+M Nr.
565 681



TR22 F : Plug coupling Ø 11 mm. Brass/stainless steel.
Max. 400 bar / 150° C

R+M Nr.
565 688

TR20 adapters lances



TR20 F : M18 M.
Alternative to adapter 8. Brass.
Max. 400 bar / 150° C

R+M Nr.
565 686




TR20 F : 1/4" M.
Stainless steel.
Max. 400 bar / 150° C

R+M Nr.
565 685 19



1/4" F : TR20 M.
Alternative to adapter 7. Brass.
Max. 400 bar / 150° C

R+M Nr.
565 685

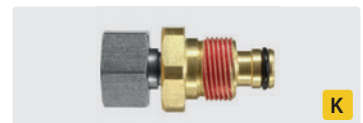

M18 IG : TR20 AG.
Alternative to adapter 7. Brass.
Max. 400 bar / 150° C


R+M Nr.
565 687

Hose connectors



TR22 M. Alternative to adapter 9.
Brass. Max. 400 bar

R+M Nr.
569 22



TR 22 M : M22 x 1,5 M. Alternative to adapter 1. Brass. Max. 400 bar

R+M Nr.
569 23

Wrench



R+M Nr.	SW
100 000 235	27