


High pressure hoses with smooth cover

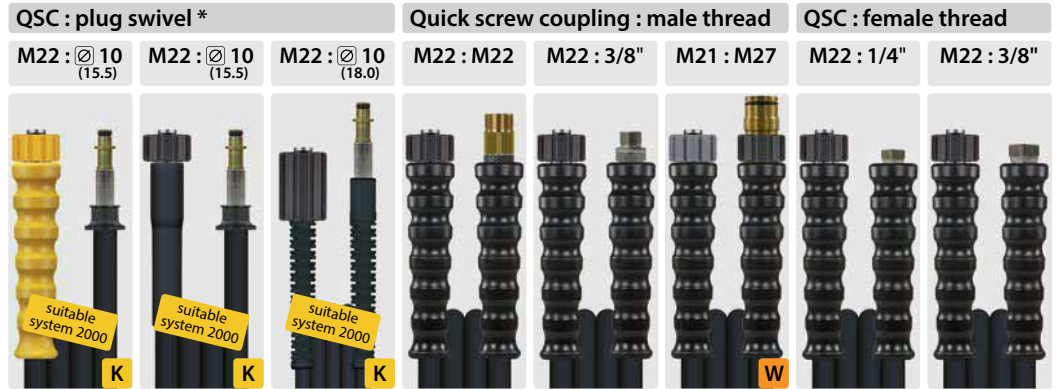

Hoses with single wire braid and smooth cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	
Flexy	6	300 bar	100 °C	10 m			390 010 210	390 028 210	390 004 210	390 003 210		390 012 210	390 013 210
				15 m			390 010 215	390 028 215	390 004 215	390 003 215		390 012 215	390 013 215
				20 m			390 010 220	390 028 220	390 004 220	390 003 220		390 012 220	390 013 220

Hoses with single wire braid and smooth cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	8	250 bar	150 °C	10 m	340 610 410			340 604 310	340 603 310	340 694 310	340 612 310	340 613 310
				15 m	340 610 415			340 604 315	340 603 315	340 694 315	340 612 315	340 613 315
				20 m	340 610 420			340 604 320	340 603 320	340 694 320	340 612 320	340 613 320
1SN	10	210 bar	150 °C	10 m			350 604 310	350 603 310	350 694 310			350 613 310
				15 m			350 604 315	350 603 315	350 694 315			350 613 315
				20 m			350 604 320	350 603 320	350 694 320			350 613 320

Hoses with double wire braid and smooth cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	10 m	345 610 410			345 604 310	345 603 310		345 612 310	345 613 310
				15 m	345 610 415			345 604 315	345 603 315		345 612 315	345 613 315
				20 m	345 610 420			345 604 320	345 603 320		345 612 320	345 613 320
2SN	10	400 bar	150 °C	10 m			355 604 310	355 603 310				355 613 310
				15 m			355 604 315	355 603 315				355 613 315
				20 m			355 604 320	355 603 320				355 613 320

Plastic hoses with single fabric braid

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	
Polya	6	160 bar	60 °C	8 m			460 010 208	460 028 208	460 004 208	460 003 208		460 012 208	460 013 208
				10 m			460 010 210	460 028 210	460 004 210	460 003 210		460 012 210	460 013 210
				15 m			460 010 215	460 028 215	460 004 215	460 003 215		460 012 215	460 013 215

High pressure hoses with smooth cover - 500 bar



Hoses with double wire braid and smooth cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	
Flexy	6	500 bar	150 °C	10 m	338 000 310 9			424 300 010 9	424 301 010 9	424 344 010 9	
				15 m	338 000 315 9			424 300 015 9	424 301 015 9	424 344 015 9	
				20 m	338 000 320 9			424 300 020 9	424 301 020 9	424 344 020 9	

* not to be used for patented Kärcher guns.