


## High pressure hoses with *smooth* cover

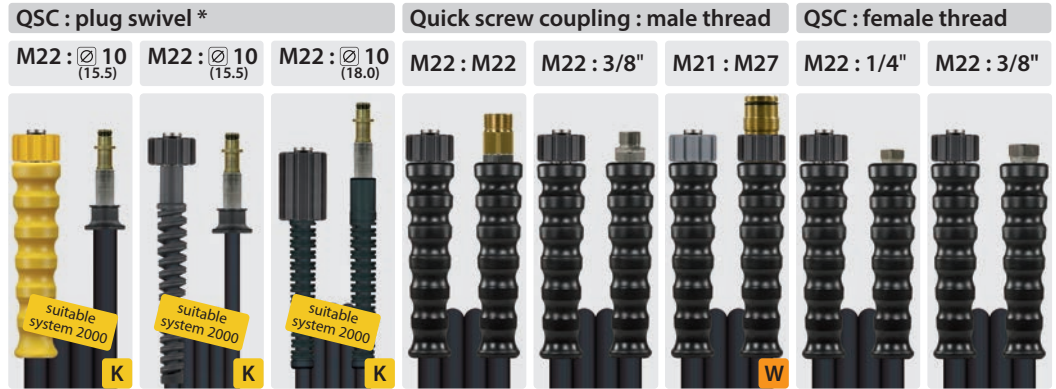

### Hoses with single wire braid and *smooth* cover

| TYP   | DN | P       | °C     | ↔    | R+M Nr. | R+M Nr. | R+M Nr.     | R+M Nr.     | R+M Nr.     | R+M Nr.     | R+M Nr. | R+M Nr.     |             |
|-------|----|---------|--------|------|---------|---------|-------------|-------------|-------------|-------------|---------|-------------|-------------|
| Flexy | 6  | 300 bar | 100 °C | 10 m |         |         | 390 010 210 | 390 028 210 | 390 004 210 | 390 003 210 |         | 390 012 210 | 390 013 210 |
|       |    |         |        | 15 m |         |         | 390 010 215 | 390 028 215 | 390 004 215 | 390 003 215 |         | 390 012 215 | 390 013 215 |
|       |    |         |        | 20 m |         |         | 390 010 220 | 390 028 220 | 390 004 220 | 390 003 220 |         | 390 012 220 | 390 013 220 |

### Hoses with single wire braid and *smooth* cover

| TYP | DN | P       | °C     | ↔    | R+M Nr.     | R+M Nr. | R+M Nr.     | R+M Nr.     | R+M Nr.     | R+M Nr.     | R+M Nr.     | R+M Nr.     |
|-----|----|---------|--------|------|-------------|---------|-------------|-------------|-------------|-------------|-------------|-------------|
| 1SN | 8  | 250 bar | 150 °C | 10 m | 340 610 410 |         |             | 340 604 310 | 340 603 310 | 340 694 310 | 340 612 310 | 340 613 310 |
|     |    |         |        | 15 m | 340 610 415 |         |             | 340 604 315 | 340 603 315 | 340 694 315 | 340 612 315 | 340 613 315 |
|     |    |         |        | 20 m | 340 610 420 |         |             | 340 604 320 | 340 603 320 | 340 694 320 | 340 612 320 | 340 613 320 |
| 1SN | 10 | 210 bar | 150 °C | 10 m |             |         | 350 604 310 | 350 603 310 | 350 694 310 |             |             | 350 613 310 |
|     |    |         |        | 15 m |             |         | 350 604 315 | 350 603 315 | 350 694 315 |             |             | 350 613 315 |
|     |    |         |        | 20 m |             |         | 350 604 320 | 350 603 320 | 350 694 320 |             |             | 350 613 320 |


### Hoses with double wire braid and *smooth* cover

| TYP | DN | P       | °C     | ↔    | R+M Nr.     | R+M Nr. | R+M Nr.     | R+M Nr.     | R+M Nr.     | R+M Nr. | R+M Nr.     | R+M Nr.     |
|-----|----|---------|--------|------|-------------|---------|-------------|-------------|-------------|---------|-------------|-------------|
| 2SN | 8  | 400 bar | 150 °C | 10 m | 345 610 410 |         |             | 345 604 310 | 345 603 310 |         | 345 612 310 | 345 613 310 |
|     |    |         |        | 15 m | 345 610 415 |         |             | 345 604 315 | 345 603 315 |         | 345 612 315 | 345 613 315 |
|     |    |         |        | 20 m | 345 610 420 |         |             | 345 604 320 | 345 603 320 |         | 345 612 320 | 345 613 320 |
| 2SN | 10 | 400 bar | 150 °C | 10 m |             |         | 355 604 310 | 355 603 310 |             |         |             | 355 613 310 |
|     |    |         |        | 15 m |             |         | 355 604 315 | 355 603 315 |             |         |             | 355 613 315 |
|     |    |         |        | 20 m |             |         | 355 604 320 | 355 603 320 |             |         |             | 355 613 320 |

### Plastic hoses with single fabric braid

| TYP   | DN | P       | °C    | ↔    | R+M Nr. | R+M Nr. | R+M Nr.     | R+M Nr.     | R+M Nr.     | R+M Nr.     | R+M Nr. | R+M Nr.     |             |
|-------|----|---------|-------|------|---------|---------|-------------|-------------|-------------|-------------|---------|-------------|-------------|
| Polya | 6  | 160 bar | 60 °C | 8 m  |         |         | 460 010 208 | 460 028 208 | 460 004 208 | 460 003 208 |         | 460 012 208 | 460 013 208 |
|       |    |         |       | 10 m |         |         | 460 010 210 | 460 028 210 | 460 004 210 | 460 003 210 |         | 460 012 210 | 460 013 210 |
|       |    |         |       | 15 m |         |         | 460 010 215 | 460 028 215 | 460 004 215 | 460 003 215 |         | 460 012 215 | 460 013 215 |

## High pressure hoses with *smooth* cover - 500 bar

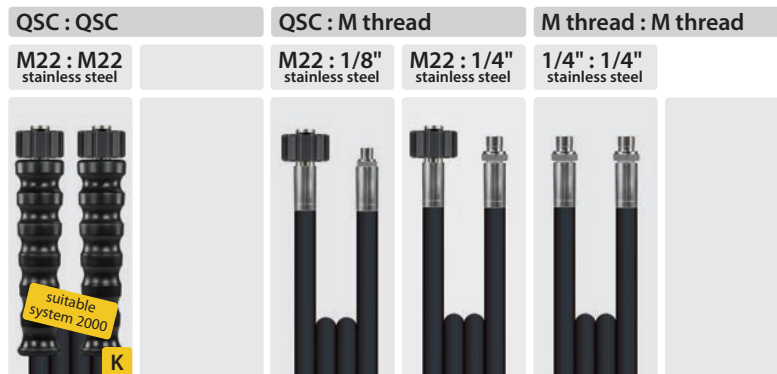

### Hoses with double wire braid and *smooth* cover

| TYP   | DN | P       | °C     | ↔    | R+M Nr.       | R+M Nr. | R+M Nr. | R+M Nr.       | R+M Nr.       | R+M Nr.       |  |
|-------|----|---------|--------|------|---------------|---------|---------|---------------|---------------|---------------|--|
| Flexy | 6  | 500 bar | 150 °C | 10 m | 338 000 310 9 |         |         | 424 300 010 9 | 424 301 010 9 | 424 344 010 9 |  |
|       |    |         |        | 15 m | 338 000 315 9 |         |         | 424 300 015 9 | 424 301 015 9 | 424 344 015 9 |  |
|       |    |         |        | 20 m | 338 000 320 9 |         |         | 424 300 020 9 | 424 301 020 9 | 424 344 020 9 |  |

\* not to be used for patented Kärcher guns.