


CARWASH COMFORT - the new hose wonder in self-service washing bays

Das Original

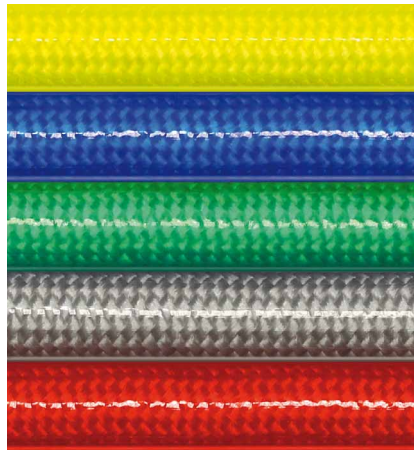

- » High standard of easy and comfortable use in combination with spraying equipment, e.g. brush lance
- » Light weight, 92 g/m at DN 6. More than half in weight in comparison to an usual self-service hose
- » Chemically resistant, smooth interior made out of PES
- » Transparent surface made out of a thermoplastic elastomer, depending on colour: CCBL, CCRT, CCGR, CCGE, CCGN
- » Oil-, UV-, ozone-resistant and weatherproof
- » Flexible in case of low temperatures: -40 °C – +60 °C, -40 °F – +140 °F

- » High-tensile polyester reinforcing, working pressure of up to 200 bar with a fourfold guarantee that the hose does not burst
- » Outer diameter 12 mm at DN 6
- » Burst pressure > 800 bar

1/4" : 1/4"		3/8" : 3/8"		M14 : M14		M18 : M18		3/8" : 3/8"	
Female thread (DKR)		Female thread (DKR)		Female thread (DKOL)		Female thread (DKOL)		Male thread (AGR)	
R+M Nr.	↔	R+M Nr.	↔	R+M Nr.	↔	R+M Nr.	↔	R+M Nr.	↔
461 052 603 5	3.5 m	461 054 603 5	3.5 m	461 072 603 5	3.5 m	461 076 603 5	3.5 m	461 044 603 5	3.5 m
461 052 603 7	3.7 m	461 054 603 7	3.7 m	461 072 603 7	3.7 m	461 076 603 7	3.7 m	461 044 603 7	3.7 m
461 052 604	4.0 m	461 054 604	4.0 m	461 072 604	4.0 m	461 076 604	4.0 m	461 044 604	4.0 m
461 052 604 2	4.2 m	461 054 604 2	4.2 m	461 072 604 2	4.2 m	461 076 604 2	4.2 m	461 044 604 2	4.2 m
461 052 604 5	4.5 m	461 054 604 5	4.5 m	461 072 604 5	4.5 m	461 076 604 5	4.5 m	461 044 604 5	4.5 m
461 052 604 7	4.7 m	461 054 604 7	4.7 m	461 072 604 7	4.7 m	461 076 604 7	4.7 m	461 044 604 7	4.7 m
461 052 605	5.0 m	461 054 605	5.0 m	461 072 605	5.0 m	461 076 605	5.0 m	461 044 605	5.0 m
461 052 605 5	5.5 m	461 054 605 5	5.5 m	461 072 605 5	5.5 m	461 076 605 5	5.5 m	461 044 605 5	5.5 m
461 052 606	6.0 m	461 054 606	6.0 m	461 072 606	6.0 m	461 076 606	6.0 m	461 044 606	6.0 m
Female thread (DKR)		Female thread (DKR)		Female thread (DKOL)		Female thread (DKOL)		Male thread (AGR)	
R+M Nr.	↔	R+M Nr.	↔	R+M Nr.	↔	R+M Nr.	↔	R+M Nr.	↔
462 052 303 5	3.5 m	462 054 303 5	3.5 m	462 072 303 5	3.5 m	462 076 303 5	3.5 m	462 044 303 5	3.5 m
462 052 303 7	3.7 m	462 054 303 7	3.7 m	462 072 303 7	3.7 m	462 076 303 7	3.7 m	462 044 303 7	3.7 m
462 052 304	4.0 m	462 054 304	4.0 m	462 072 304	4.0 m	462 076 304	4.0 m	462 044 304	4.0 m
462 052 304 2	4.2 m	462 054 304 2	4.2 m	462 072 304 2	4.2 m	462 076 304 2	4.2 m	462 044 304 2	4.2 m
462 052 304 5	4.5 m	462 054 304 5	4.5 m	462 072 304 5	4.5 m	462 076 304 5	4.5 m	462 044 304 5	4.5 m
462 052 304 7	4.7 m	462 054 304 7	4.7 m	462 072 304 7	4.7 m	462 076 304 7	4.7 m	462 044 304 7	4.7 m
462 052 305	5.0 m	462 054 305	5.0 m	462 072 305	5.0 m	462 076 305	5.0 m	462 044 305	5.0 m
462 052 305 5	5.5 m	462 054 305 5	5.5 m	462 072 305 5	5.5 m	462 076 305 5	5.5 m	462 044 305 5	5.5 m
462 052 306	6.0 m	462 054 306	6.0 m	462 072 306	6.0 m	462 076 306	6.0 m	462 044 306	6.0 m

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.