







CARWASH COMFORT Premium

- » Extremely flexible and elastic high-pressure hose, thanks to a special plastic compound
- » For use in professional car cleaning
- » Highest resistance to oil, UV-, ozone- and weatherproof
- » Experience the new orange miracle in use, maximum durability and flexibility for perfect vehicle care
- » The solution in the self-service washing area for professionals by professionals
- » Flexible in case of low temperatures: -40 °C – +60 °C, -40 °F – +140 °F
- » High-tensile polyester reinforcing, working pressure of up to 200 bar with a fourfold guarantee that the hose does not burst
- » Outer diameter 12.8 mm at DN 6
- » Burst pressure > 800 bar

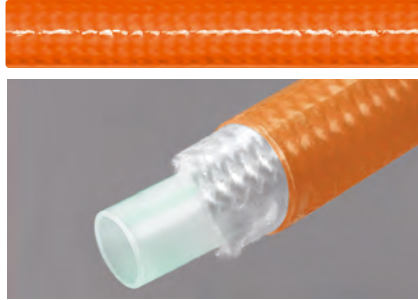

Premium

1/4" : 1/4"	3/8" : 3/8"	M14 : M14	M18 : M18	3/8" : 3/8"																																																																																																						
 new	 new	 new	 new	 new																																																																																																						
Female thread (DKR)	Female thread (DKR)	Female thread (DKOL)	Female thread (DKOL)	Male thread (AGR)																																																																																																						
<table border="1"> <thead> <tr> <th>R+M Nr.</th> <th>↔</th> <th>R+M Nr.</th> <th>↔</th> </tr> </thead> <tbody> <tr><td>466 052 133 5</td><td>3.5 m</td><td>466 054 133 5</td><td>3.5 m</td></tr> <tr><td>466 052 133 7</td><td>3.7 m</td><td>466 054 133 7</td><td>3.7 m</td></tr> <tr><td>466 052 134</td><td>4.0 m</td><td>466 054 134</td><td>4.0 m</td></tr> <tr><td>466 052 134 2</td><td>4.2 m</td><td>466 054 134 2</td><td>4.2 m</td></tr> <tr><td>466 052 134 5</td><td>4.5 m</td><td>466 054 134 5</td><td>4.5 m</td></tr> <tr><td>466 052 134 7</td><td>4.7 m</td><td>466 054 134 7</td><td>4.7 m</td></tr> <tr><td>466 052 135</td><td>5.0 m</td><td>466 054 135</td><td>5.0 m</td></tr> <tr><td>466 052 135 5</td><td>5.5 m</td><td>466 054 135 5</td><td>5.5 m</td></tr> <tr><td>466 052 136</td><td>6.0 m</td><td>466 054 136</td><td>6.0 m</td></tr> </tbody> </table>	R+M Nr.	↔	R+M Nr.	↔	466 052 133 5	3.5 m	466 054 133 5	3.5 m	466 052 133 7	3.7 m	466 054 133 7	3.7 m	466 052 134	4.0 m	466 054 134	4.0 m	466 052 134 2	4.2 m	466 054 134 2	4.2 m	466 052 134 5	4.5 m	466 054 134 5	4.5 m	466 052 134 7	4.7 m	466 054 134 7	4.7 m	466 052 135	5.0 m	466 054 135	5.0 m	466 052 135 5	5.5 m	466 054 135 5	5.5 m	466 052 136	6.0 m	466 054 136	6.0 m	<table border="1"> <thead> <tr> <th>R+M Nr.</th> <th>↔</th> <th>R+M Nr.</th> <th>↔</th> </tr> </thead> <tbody> <tr><td>466 072 133 5</td><td>3.5 m</td><td>466 076 133 5</td><td>3.5 m</td></tr> <tr><td>466 072 133 7</td><td>3.7 m</td><td>466 076 133 7</td><td>3.7 m</td></tr> <tr><td>466 072 134</td><td>4.0 m</td><td>466 076 134</td><td>4.0 m</td></tr> <tr><td>466 072 134 2</td><td>4.2 m</td><td>466 076 134 2</td><td>4.2 m</td></tr> <tr><td>466 072 134 5</td><td>4.5 m</td><td>466 076 134 5</td><td>4.5 m</td></tr> <tr><td>466 072 134 7</td><td>4.7 m</td><td>466 076 134 7</td><td>4.7 m</td></tr> <tr><td>466 072 135</td><td>5.0 m</td><td>466 076 135</td><td>5.0 m</td></tr> <tr><td>466 072 135 5</td><td>5.5 m</td><td>466 076 135 5</td><td>5.5 m</td></tr> <tr><td>466 072 136</td><td>6.0 m</td><td>466 076 136</td><td>6.0 m</td></tr> </tbody> </table>	R+M Nr.	↔	R+M Nr.	↔	466 072 133 5	3.5 m	466 076 133 5	3.5 m	466 072 133 7	3.7 m	466 076 133 7	3.7 m	466 072 134	4.0 m	466 076 134	4.0 m	466 072 134 2	4.2 m	466 076 134 2	4.2 m	466 072 134 5	4.5 m	466 076 134 5	4.5 m	466 072 134 7	4.7 m	466 076 134 7	4.7 m	466 072 135	5.0 m	466 076 135	5.0 m	466 072 135 5	5.5 m	466 076 135 5	5.5 m	466 072 136	6.0 m	466 076 136	6.0 m	<table border="1"> <thead> <tr> <th>R+M Nr.</th> <th>↔</th> <th>R+M Nr.</th> <th>↔</th> </tr> </thead> <tbody> <tr><td>466 044 133 5</td><td>3.5 m</td><td>466 044 133 7</td><td>3.7 m</td></tr> <tr><td>466 044 134</td><td>4.0 m</td><td>466 044 134 2</td><td>4.2 m</td></tr> <tr><td>466 044 134 5</td><td>4.5 m</td><td>466 044 134 7</td><td>4.7 m</td></tr> <tr><td>466 044 135</td><td>5.0 m</td><td>466 044 135 5</td><td>5.5 m</td></tr> <tr><td>466 044 136</td><td>6.0 m</td><td></td><td></td></tr> </tbody> </table>	R+M Nr.	↔	R+M Nr.	↔	466 044 133 5	3.5 m	466 044 133 7	3.7 m	466 044 134	4.0 m	466 044 134 2	4.2 m	466 044 134 5	4.5 m	466 044 134 7	4.7 m	466 044 135	5.0 m	466 044 135 5	5.5 m	466 044 136	6.0 m		
R+M Nr.	↔	R+M Nr.	↔																																																																																																							
466 052 133 5	3.5 m	466 054 133 5	3.5 m																																																																																																							
466 052 133 7	3.7 m	466 054 133 7	3.7 m																																																																																																							
466 052 134	4.0 m	466 054 134	4.0 m																																																																																																							
466 052 134 2	4.2 m	466 054 134 2	4.2 m																																																																																																							
466 052 134 5	4.5 m	466 054 134 5	4.5 m																																																																																																							
466 052 134 7	4.7 m	466 054 134 7	4.7 m																																																																																																							
466 052 135	5.0 m	466 054 135	5.0 m																																																																																																							
466 052 135 5	5.5 m	466 054 135 5	5.5 m																																																																																																							
466 052 136	6.0 m	466 054 136	6.0 m																																																																																																							
R+M Nr.	↔	R+M Nr.	↔																																																																																																							
466 072 133 5	3.5 m	466 076 133 5	3.5 m																																																																																																							
466 072 133 7	3.7 m	466 076 133 7	3.7 m																																																																																																							
466 072 134	4.0 m	466 076 134	4.0 m																																																																																																							
466 072 134 2	4.2 m	466 076 134 2	4.2 m																																																																																																							
466 072 134 5	4.5 m	466 076 134 5	4.5 m																																																																																																							
466 072 134 7	4.7 m	466 076 134 7	4.7 m																																																																																																							
466 072 135	5.0 m	466 076 135	5.0 m																																																																																																							
466 072 135 5	5.5 m	466 076 135 5	5.5 m																																																																																																							
466 072 136	6.0 m	466 076 136	6.0 m																																																																																																							
R+M Nr.	↔	R+M Nr.	↔																																																																																																							
466 044 133 5	3.5 m	466 044 133 7	3.7 m																																																																																																							
466 044 134	4.0 m	466 044 134 2	4.2 m																																																																																																							
466 044 134 5	4.5 m	466 044 134 7	4.7 m																																																																																																							
466 044 135	5.0 m	466 044 135 5	5.5 m																																																																																																							
466 044 136	6.0 m																																																																																																									

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

Symbols ↔ length