

PURclean365+® - Lebensmittelschlauch

PURclean365+® 40

Dichtkegel DKR 1/2"

-20 °C - +70 °C. Edelstahl Armaturen



R+M Nr.	↔	
476 456 202 59	↔	2,5 m
476 456 210 9	↔	10,0 m
476 456 215 9	↔	15,0 m
476 456 220 9	↔	20,0 m
476 456 225 9	↔	25,0 m
476 456 230 9	↔	30,0 m
476 456 235 9	↔	35,0 m
476 456 240 9	↔	40,0 m

AGR 1/2" : AGR 1/2"



R+M Nr.	↔	
476 446 202 59	↔	2,5 m
476 446 210 9	↔	10,0 m
476 446 215 9	↔	15,0 m
476 446 220 9	↔	20,0 m
476 446 225 9	↔	25,0 m
476 446 230 9	↔	30,0 m
476 446 235 9	↔	35,0 m
476 446 240 9	↔	40,0 m

Dichtkegel DKR 1/2"

-20 °C - +70 °C. Edelstahl Armaturen



R+M Nr.	↔	
476 256 702 59	↔	2,5 m
476 256 710 9	↔	10,0 m
476 256 715 9	↔	15,0 m
476 256 720 9	↔	20,0 m
476 256 725 9	↔	25,0 m
476 256 730 9	↔	30,0 m
476 256 735 9	↔	35,0 m
476 256 740 9	↔	40,0 m

AGR 1/2" : AGR 1/2"



R+M Nr.	↔	
476 246 702 59	↔	2,5 m
476 246 710 9	↔	10,0 m
476 246 715 9	↔	15,0 m
476 246 720 9	↔	20,0 m
476 246 725 9	↔	25,0 m
476 246 730 9	↔	30,0 m
476 246 735 9	↔	35,0 m
476 246 740 9	↔	40,0 m


PURclean365+® 40 Meterware

R+M Nr.	DN	↔	↘	P 20 °C	P 70 °C	BP 20 °C	⊞
303 660 42	12	10 - 100 m	4,5	100 bar	45 bar	≥ 250 bar	0,25 kg

PURclean365+® 40 Meterware


R+M Nr.	DN	↔	↘	P 20 °C	P 70 °C	BP 20 °C	⊞
303 660 43	12	10 - 100 m	4,5	100 bar	45 bar	≥ 250 bar	0,25 kg

Schraubarmaturen für PURclean365+®

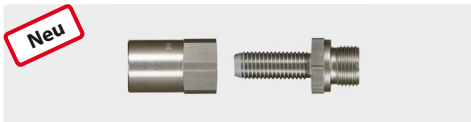

AGR 1/2". Edelstahl.
Max. 50 bar

R+M Nr.	DN
329 412 129	12

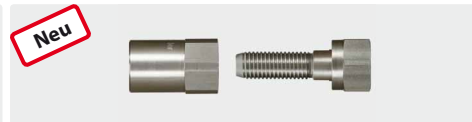

DKR 1/2". Edelstahl.
Max. 50 bar

R+M Nr.	DN
329 512 129	12



DKR 1/2" Flachdichtend. Edelstahl. Max. 50 bar.

R+M Nr.	DN
329 612 129	12