

## Food high pressure hoses per metre

- » Food hose according to 2002/72/EC
- » Especially designed for industrial foam cleaning applications
- » Fivefold coated PVC hose with a flush surface

- » **Twofold textile meshwork**
- » Suitable for: water and water mixes of usual cleaning detergents

### blufood®



**Field of application:** foam hose and pre-spraying hose for the food industry.  
Suitable for the contact with liquid food products

R+M Nr.	TYP	DN	∅	P	BP	°C
303 70	blufood	12	22	50 bar	240	-20 °C - +70 °C
303 700 019	blufood	19	31	12 bar	240	-20 °C - +70 °C

## Food high pressure hoses per metre

### Foodjet



- » Food hose EN 854
- » **Particularly resistant to animal and poultry fats**
- » Surface synthetic rubber
- » **Interior synthetic, oil-resistant rubber**
- » **2 tight textile meshwork**

- » Suitable for: oil, water, water-in-oil emulsion and water mixes with up to 50 % detergent
- » Particularly abrasion-, oil-, ozone-resistant, weatherproof and food safe

**Field of application:** cleaning hose designed for the food industry.

R+M Nr.	TYP	DN	∅	P	BP	°C
303 60	Foodjet	12	19.7	80 bar	240	-40 °C - +150 °C

### greyflex




- » Especially developed to meet highest requirements to hygiene and ergonomics
- » Smooth surface made out of thermoplastic elastomer
- » **Brass-plated wire braid, fabric braid, high-tensile polyester meshwork and PES-interior very resistant to detergents**

- » Suitable for: oil, water, water-oil emulsion and water-detergent mixture.
- » Particularly abrasion-, UV-, grease-, oil-, ozone-resistant and weatherproof
- » extremely light weight and flexible in case of low temperatures
- » Roll at 100 m

**Field of application:** Food and beverage industry, fish farming and swimming pools

R+M Nr.	TYP	DN	∅	P	BP	°C
300 201 110	greyflex	10	17.4	275 bar	1100	-40 °C - +120 °C

### easyfarm365+

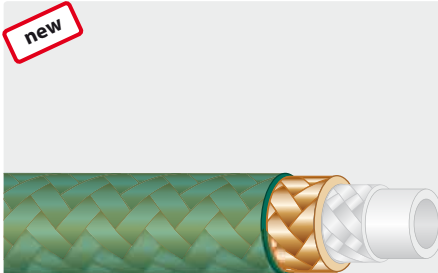

**new**

- » Especially developed for the use in the agriculture
- » Excellent ease of use and high safety
- » Smooth transparent surface made out of thermoplastic elastomer
- » **Brass-plated wire braid, fabric braid, high-tensile polyester meshwork and PES-interior very resistant to detergents**

- » Suitable for: oil, water, water-oil emulsion and water-detergent mixture
- » Particularly abrasion-, UV-, oil-, ozone-resistant and weatherproof
- » Ideal for the use on rough floors under hardest conditions
- » Roll at 100 m

**Field of application:** Professional cot and machine cleaning in the agriculture

R+M Nr.	TYP	DN	∅	P	BP	°C
300 201 408	easyfarm365+	8	15.1	250 bar	1000	-40 °C - +120 °C
300 201 410	easyfarm365+	10	17.4	275 bar	1100	-40 °C - +120 °C
300 201 412	easyfarm365+	12	20.8	180 bar	720	-40 °C - +120 °C

**Symbols** DN nominal diameter ∅ diameter TYP type P pressure BP burst pressure °C temperature