


High pressure hoses for special applications

greyflex – high pressure hose

- » Ideal field of application: food and beverage industry, fish farming and swimming pools
- » Plug, crimp and connection stainless steel
- » Excellent ease of use, extremely light weight and flexible in case of low temperatures
- » Smooth and stain-resistant surface made out of thermoplastic elastomer
- » Ideal for the use on rough floors due to high abrasion resistance
- » Grease, oil-, UV-, ozone-resistant and weatherproof
- » Brass-plated wire braid
- » Suitable for working pressures of max. 275 bar.
DN 10. -40 °C - +120 °C, -40 °F - +248 °F

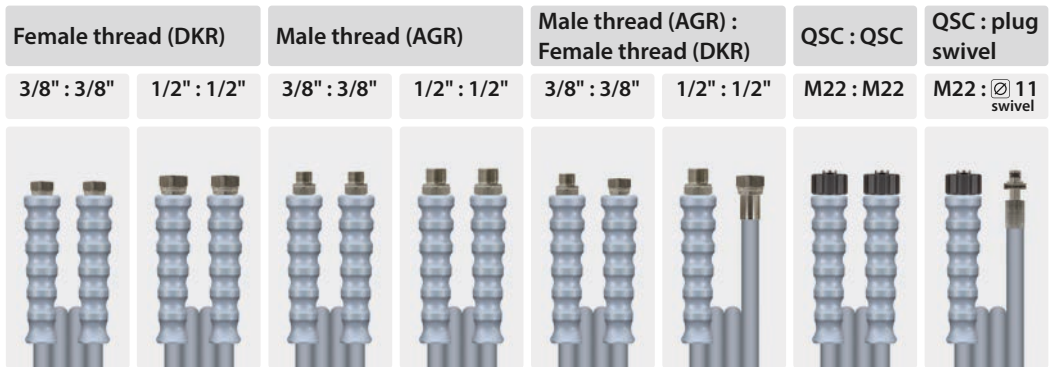

| TYP | DN | P | °C | ↔ | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. | R+M Nr. |
|------------------------|----|---------|--------|------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| greyflex new | 8 | 250 bar | 120 °C | 10 m | 342 201 545 109 | | 342 201 445 109 | 342 201 465 109 | 342 201 555 109 | 342 201 578 109 | 342 201 005 109 | 342 201 115 109 |
| | | | | | 342 201 545 159 | | 342 201 445 159 | 342 201 465 159 | 342 201 555 159 | 342 201 578 159 | 342 201 005 159 | 342 201 115 159 |
| | | | | | 342 201 545 209 | | 342 201 445 209 | 342 201 465 209 | 342 201 555 209 | 342 201 578 209 | 342 201 005 209 | 342 201 115 209 |
| | | | | | 342 201 545 259 | | 342 201 445 259 | 342 201 465 259 | 342 201 555 259 | 342 201 578 259 | 342 201 005 259 | 342 201 115 259 |
| | | | | | 342 201 545 309 | | 342 201 445 309 | 342 201 465 309 | 342 201 555 309 | 342 201 578 309 | 342 201 005 309 | 342 201 115 309 |
| greyflex | 10 | 275 bar | 120 °C | 10 m | 352 201 545 109 | 352 201 565 109 | 352 201 445 109 | 352 201 465 109 | 352 201 555 109 | 352 201 578 109 | 352 201 005 109 | 352 201 115 109 |
| | | | | | 352 201 545 159 | 352 201 565 159 | 352 201 445 159 | 352 201 465 159 | 352 201 555 159 | 352 201 578 159 | 352 201 005 159 | 352 201 115 159 |
| | | | | | 352 201 545 209 | 352 201 565 209 | 352 201 445 209 | 352 201 465 209 | 352 201 555 209 | 352 201 578 209 | 352 201 005 209 | 352 201 115 209 |
| | | | | | 352 201 545 259 | 352 201 565 259 | 352 201 445 259 | 352 201 465 259 | 352 201 555 259 | 352 201 578 259 | 352 201 005 259 | 352 201 115 259 |
| | | | | | 352 201 545 309 | 352 201 565 309 | 352 201 445 309 | 352 201 465 309 | 352 201 555 309 | 352 201 578 309 | 352 201 005 309 | 352 201 115 309 |