

Reusable screw nipples

Reusable screw nipples, BSP thread

» Zinc-plated steel



Reusable screw nipples with metric thread

» Zinc-plated steel



DN	⊘	R+M Nr.	TYP	R+M Nr.	TYP	DN	⊘	R+M Nr.	TYP	R+M Nr.	TYP	R+M Nr.	TYP
6	1/4"	328 05	DKR			6	M14 x 1.5	328 48	DKOL				
8	3/8"	328 20	DKR	328 10	AGR	8	M16 x 1.5	328 60	DKOL	328 50	CEL		
10	3/8"	328 40	DKR	328 30	AGR	8	M22 x 1.5					320 60	QSC
12	1/2"	328 46	DKR	328 45	AGR	10	M18 x 1.5	328 80	DKOL	328 70	CEL		

Screw cartridges

» Zinc-plated steel
» Not to skive




Hose with single wire braid - SAE 100

R+M Nr.	DN	hose
327 05	6	1SN 06
327 15	8	1SN 08
327 35	10	1SN 10
327 55	12	1SN 12

Hose with double wire braid - DIN standard


R+M Nr.	DN	hose
327 25	8	2SN 08
327 45	10	2SN 10

Screw fittings for bluflood®

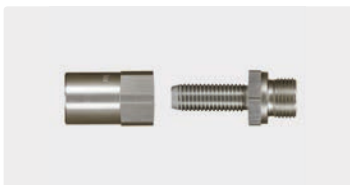


1/2" M with 60° cone. Stainless steel.
Max. 50 bar

R+M Nr.	DN
329 012 129	12

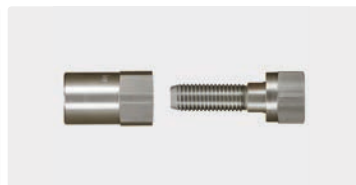

1/2" F with 60° cone. Stainless steel.
Max. 50 bar

R+M Nr.	DN
329 112 129	12

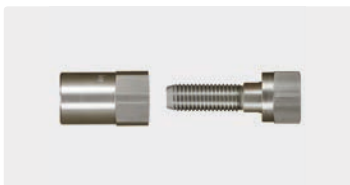

DKR 1/2" flat sealing. Stainless steel.
Max. 50 bar.

R+M Nr.	DN
329 312 129	12

Hose fittings pre-assembled

suitable for bluflood and PReClean365+®



AGR 1/2". Stainless steel. Max. 150 bar

R+M Nr.	DN
315 665	12



DKR 1/2". Stainless steel. Max. 150 bar

R+M Nr.	DN
316 429 5	12



Symbols DN nominal diameter ⊘ diameter I height M material TYP type ⊙ thread