

ST-71 hose reel with sewer cleaning hose



The ST-71 hose reel is equipped with a 15 m Flexy sewer cleaning hose DN 6. The frame of the reel is made out of stainless steel and the reel is made out of plastic.


The space-saving and orderly solution can either be hung up at the wall or refitted in high pressure cleaner.

The hose can be used as extension of high pressure hoses or as sewer cleaning hose.

Max. 300 bar / 100 °C

R+M Nr.	☺	☻
200 071 615	1/4" M	M22 M
200 071 620	1/8" M	M22 M
200 071 625	M22 F	M22 M
200 071 626	M22 F swivel	M22 M

ST-540 foot valves

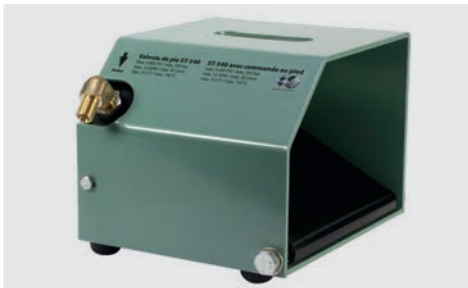

Incl. HP-gun ST-2605. Material housing powder-coated steel. Rubber feet. Max. 350 bar / 45 l/min / 150 °C



Incl. HP-gun ST-2750. Material housing powder-coated steel. Rubber feet. Max. 500 bar / 30 l/min / 150 °C



Incl. HP-gun ST-2750. Material housing powder-coated steel. Rubber feet. Max. 500 bar / 30 l/min / 150 °C

R+M Nr.	☺	☻
200 540 500	1/4" M	3/8" F

R+M Nr.	☺	☻
200 540 550	1/4" M	3/8" F

R+M Nr.	☺	☻
200 540 560	M22 M	M22 M

ST-33 high Pressure Filter




Brass with stainless steel filter. Bidirectional. Max. 400 bar / 40 l/min. / 150 °C

R+M Nr.	I	☉	☉
200 033 855	45.6 mm	1/4" M	1/4" F

Crimp nipples

Stainless steel. Flat sealing

R+M Nr.	DN	☉
315 393	8	1/4"
315 593	8	3/8"
315 693	10	3/8"
315 663	12	1/2"

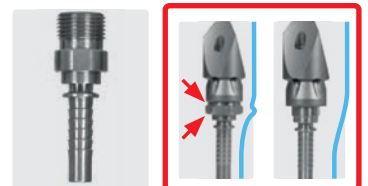

Reduction nipple



Stainless steel. 500 bar

R+M Nr.	☺	☻
040 002 207	1/4" F	1/8" M

Protective clothing is shown on the pages 537-538.

Symbols ☐ nozzle DN nominal diameter ☺ outlet ☻ inlet ∅ diameter ○ thread I height