



Suttner foam guns

ST-3225 HP

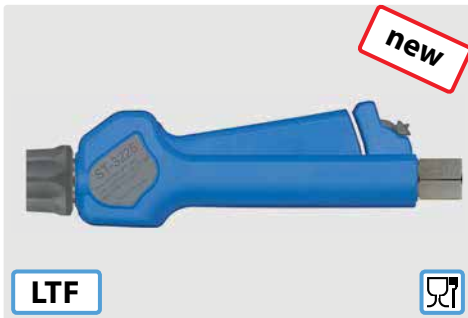


Professional hp gun with progressive closing system and coupling ST-3100. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 60 bar / 120 l/min / 100 °C

| | | |
|-------------|------------------|---------------|
| R+M Nr. | | |
| 203 225 550 | coupling ST-3100 | 1/2" F swivel |

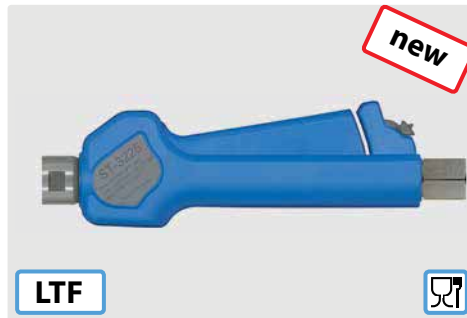

Professional hp gun with progressive closing system. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 60 bar / 120 l/min / 100 °C


| | | |
|-------------|--------|---------------|
| R+M Nr. | | |
| 203 225 545 | 1/2" F | 1/2" F swivel |

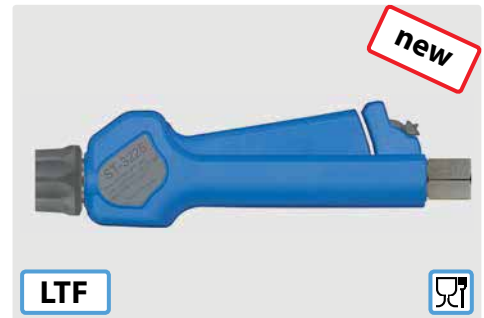

Professional hp gun with coupling ST-3100. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 60 bar / 120 l/min / 100 °C


| | | |
|-------------|------------------|---------------|
| R+M Nr. | | |
| 203 225 540 | coupling ST-3100 | 1/2" F swivel |

ST-3225 LP

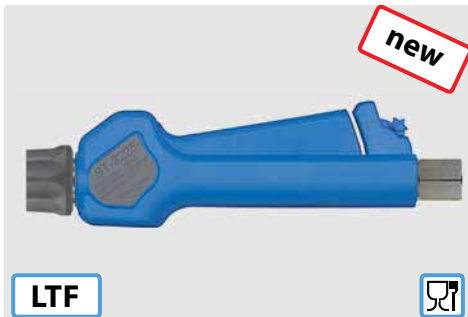


Professional gun with progressive closing system, locking in opened position and coupling ST-3100. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 24.5 bar / 120 l/min / 100 °C

| | | |
|-------------|------------------|---------------|
| R+M Nr. | | |
| 203 225 650 | coupling ST-3100 | 1/2" F swivel |

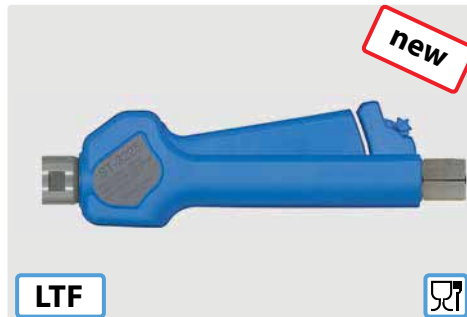

Professional gun with progressive closing system and locking in opened position. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 24.5 bar / 120 l/min / 100 °C

| | | |
|-------------|--------|---------------|
| R+M Nr. | | |
| 203 225 645 | 1/2" F | 1/2" F swivel |

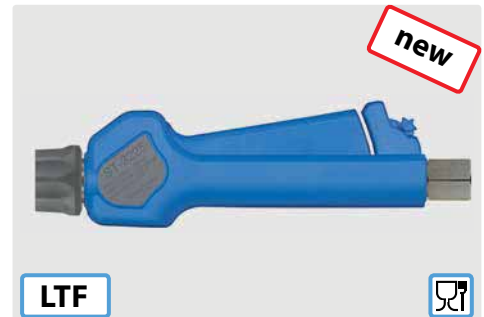

Professional gun with locking in opened position and coupling ST-3100. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 24.5 bar / 120 l/min / 100 °C

| | | |
|-------------|------------------|---------------|
| R+M Nr. | | |
| 203 225 640 | coupling ST-3100 | 1/2" F swivel |

ST-2700 KW



Professional gun with patented LTF technology. Stainless steel. Gun with coupling KW. Max. 310 bar / 45 l/min / 150 °C

| | | |
|-------------|-------------|--------|
| R+M Nr. | | |
| 202 700 560 | coupling KW | 3/8" F |

ST-2700 KW



Professional gun with patented LTF technology. Stainless steel. Gun with coupling KW. Max. 310 bar / 45 l/min / 150 °C

| | | |
|-------------|-------------|---------------|
| R+M Nr. | | |
| 202 700 575 | coupling KW | 3/8" F swivel |

ST-2700 KW



Professional gun with patented LTF technology. Stainless steel. Gun with coupling KW. Max. 310 bar / 45 l/min / 150 °C

| | | |
|-------------|-------------|-------|
| R+M Nr. | | |
| 202 700 565 | coupling KW | M22 M |

Symbols outlet inlet length