

## Suttner spray guns

ST-2700



Professional gun with patented LTF technology. Stainless steel. Gun for industrial cleaning applications. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 700 500	1/4" F	3/8" F

ST-2715



Professional gun with patented LTF technology. Stainless steel. Ceramic ball, chemically resistant valve and acid-resistant stainless steel sealing seat. Gun for industrial cleaning applications with abrasive mediums. Max. 350 bar / 45 l/min / 150 °C

R+M Nr.		
202 715 500	1/4" F	3/8" F



Professional gun with patented LTF technology. Stainless steel. Ceramic ball, chemically resistant valve and acid-resistant stainless steel sealing seat. Gun for industrial cleaning applications with abrasive mediums. Max. 350 bar / 45 l/min / 150 °C

R+M Nr.		
202 715 580	M22 M	M22 M swivel

ST-2720



Professional gun with patented LTF technology. Stainless steel. Particularly designed for high flow rates. Suitable for e.g. municipal cleaning applications. Max. 125 bar / 80 l/min / 150 °C

R+M Nr.		
202 720 500	1/4" F	3/8" F

### Coupling KW



Spare coupling for ST-2700 with coupling KW

R+M Nr.
202 700 301

Spare coupling for ST-2700 with coupling KW


R+M Nr.
202 700 306



Made out of plastics intended to come into contact with food-stuffs according to Regulation (EC) No. 1935/2004. Especially designed for applications in the food industry.



### Valves complete

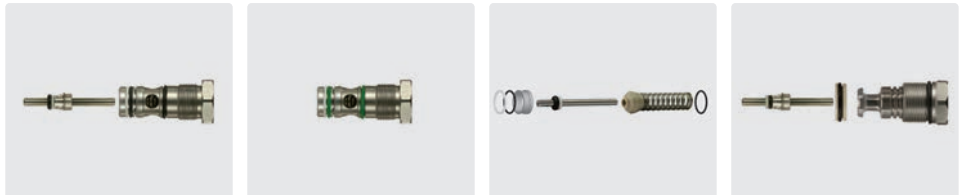

ST-2700

R+M Nr.
202 700 490

ST-2715. Ceramic ball

R+M Nr.
202 700 445


ST-2720

R+M Nr.
202 710 490

ST-2725

R+M Nr.
202 725 490

### ST-340 swivel

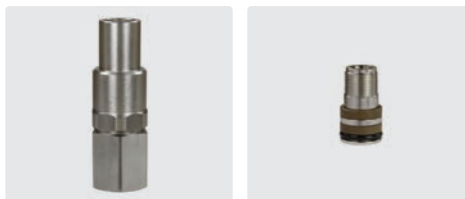

1/4" F : 1/2" F

R+M Nr.
200 340 050

Repair kit ST-340

R+M Nr.
200 340 100

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Symbols outlet inlet