

## Pre-spraying kits

## Low pressure injectors



Injector with metering valve. Suction hose  
1,000 mm. Suction filter ST-31. 2 bar - max. 10 bar

R+M Nr.		
545 101	3/4" F	3/8" F




Min. 2 bar - max. 10 bar. Output of approx. 150 l/h  
at 2 bar. Mixing of chemicals approx. 0 - 11.5 %

R+M Nr.	TYP	D		
200 060 700	1	ST-60.1	1.6 3/8" M	3/8" F
200 060 710	1	ST-60.1	1.8 3/8" M	3/8" F
050 000 370	2	o-ring		
200 061 500	3	metering valve hose tail $\varnothing$ 6 mm		

## Ball valves


## Standard

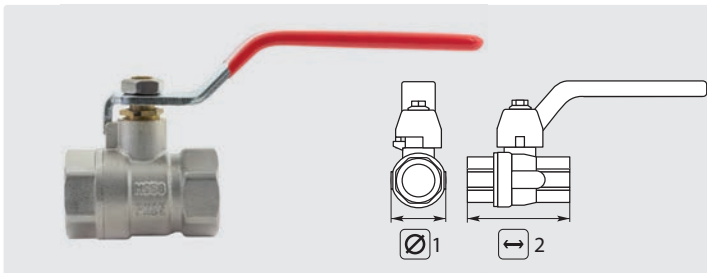

Nickel-plated brass. Ball chrome-plated.  
Max. 25 bar / 60 °C

R+M Nr.		$\varnothing$ 1	$\rightleftharpoons$ 2	SW
705 10	1/4" F	23.5	40	19
705 20	3/8" F	23.5	40	19
705 30	1/2" F	28.0	46	24
705 40	3/4" F	34.7	53	30
705 50	1" F	42.5	64	37

## Ball valves with butterfly handle

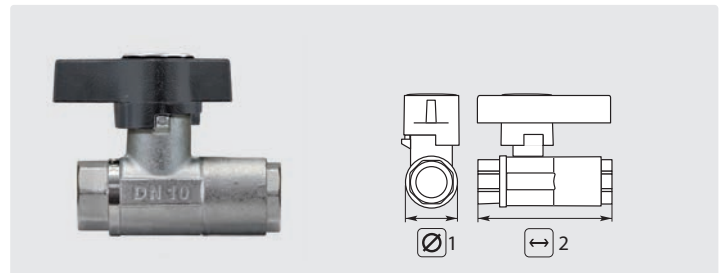

Nickel-plated brass. Ball chrome-plated.  
Max. 210 bar / 80 °C

R+M Nr.		$\varnothing$ 1	$\rightleftharpoons$ 2
705 383 82	3/8" F	30 mm	75 mm
705 121 22	1/2" F	36 mm	85 mm

Symbols inlet outlet  $\rightleftharpoons$  length  $\downarrow$  height TYP type  $\varnothing$  thread D nozzle DN nominal diameter V voltage SW hexagon