

Pre-spraying kits

Pre-spraying kits to connect to the tap



- » Lance with insulation 1200 mm
- » Suction hose 2 m. Spray hose 10 m
- » Spray nozzle 1/4" M 40° 15
- » For tap 3/4" F
- » Min. 2 bar - max. 10 bar
- » Output of approx. 150 l/h at 2 bar
- » Mixing of chemicals approx. 0 - 11.5 %
- » Please use backflow preventer (R+M Nr. 734 10)

R+M Nr.	↔
545 110	10 m
545 120	20 m
545 125	25 m

Low pressure injectors



Min. 2 bar - max. 10 bar. Output of approx. 150 l/h at 2 bar. Mixing of chemicals approx. 0 - 11.5 %

R+M Nr.	TYP	D	G	⊗
200 060 700 1	ST-60.1	1.6	3/8" M	3/8" F
200 060 710 1	ST-60.1	1.8	3/8" M	3/8" F
050 000 370 2	o-ring			
200 061 500 3	metering valve hose tail ⊗ 6 mm			

Low pressure injector




Injector with metering valve. Suction hose 1000 mm. Suction filter ST-31. 2 bar - max. 10 bar

R+M Nr.	G	⊗
545 101	3/4" F	3/8" F

Ball valves

Standard

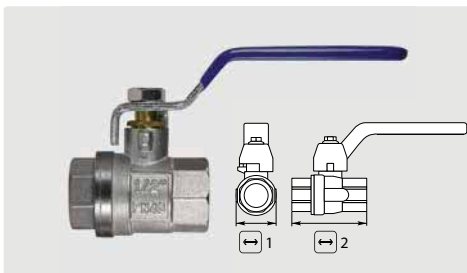

Nickel-plated brass. Ball chrome-plated.
Max. 25 bar / 60 °C

R+M Nr.	⊙	↔ 1	⊥ 2
705 10	1/4" F	17 mm	45 mm
705 20	3/8" F	20 mm	45 mm
705 30	1/2" F	24 mm	50 mm
705 40	3/4" F	31 mm	56 mm
705 50	1" F	36 mm	69 mm

Ball valves with butterfly handle



Nickel-plated brass. Ball chrome-plated.
Max. 210 bar / 80 °C

R+M Nr.	⊙	↔ 1	⊥ 2
705 383 82	3/8" F	30 mm	75 mm
705 121 22	1/2" F	36 mm	85 mm



Nickel-plated brass. Ball chrome-plated.
Max. 15 bar / 90 °C

R+M Nr.	⊙	↔ 1	⊥ 2
010 008 110	1/4" F	40 mm	40 mm

Symbols ⊙ inlet ⊗ outlet ↔ length ⊥ height TYP type ⊙ thread ⊗ diameter DN nominal diameter V voltage