

Lances

ST-26 Cool & Soft



Lance with insulation ST-26 Cool & Soft. Comfortable grip and ergonomic shape. Heat-proof insulation. Heat-proof insulation. Max. 400 bar / 150 °C


R+M Nr.	⊙	ISO	⇄	M
200 026 405 *	1/4" M	400 mm	500 mm	stainless steel
200 026 410	1/4" M	400 mm	1,000 mm	stainless steel

R+M Nr.	⊙	ISO	⇄	M

ST-28 Cool & Compact



Lance with insulation ST-28 Cool & Compact. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

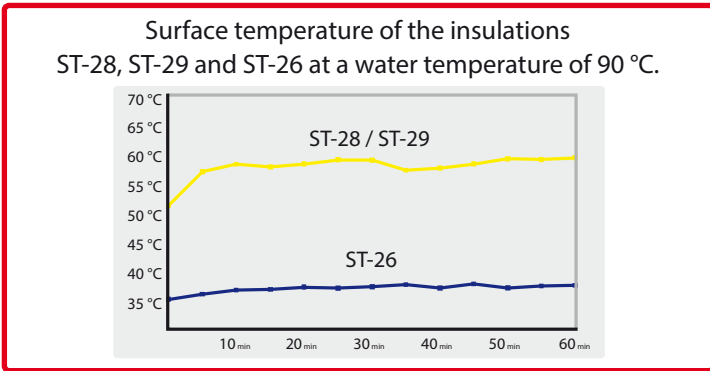

R+M Nr.	⊙	ISO	⇄	M
200 028 303	1/4" M	300 mm	330 mm	zinc-plated steel
200 028 305	1/4" M	300 mm	500 mm	zinc-plated steel
200 028 306	1/4" M	300 mm	600 mm	zinc-plated steel
200 028 307	1/4" M	300 mm	700 mm	zinc-plated steel
200 028 408	1/4" M	400 mm	800 mm	zinc-plated steel
200 028 309	1/4" M	300 mm	900 mm	zinc-plated steel
200 028 410	1/4" M	400 mm	1,000 mm	zinc-plated steel
200 028 312 *	1/4" M	300 mm	1,200 mm	zinc-plated steel
200 028 412	1/4" M	400 mm	1,200 mm	zinc-plated steel

ST-29 Cool & Compact



Lance with insulation ST-29 Cool & Compact green. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	⇄	M
200 029 317	1/4" M	300 mm	900 mm	stainless steel

R+M Nr.	⊙	ISO	⇄	M



Lance with insulation ST-29 Cool & Compact blue. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	⇄	M
200 029 315	1/4" M	300 mm	900 mm	stainless steel

R+M Nr.	⊙	ISO	⇄	M



Lance with insulation ST-29 Cool & Compact red. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	⇄	M
200 029 318	1/4" M	300 mm	900 mm	stainless steel

R+M Nr.	⊙	ISO	⇄	M



Lance with insulation ST-29 Cool & Compact yellow. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	⇄	M
200 029 316	1/4" M	300 mm	900 mm	stainless steel

R+M Nr.	⊙	ISO	⇄	M

\* limited stock