


Lances

ST-001 with insulation ST-9.9

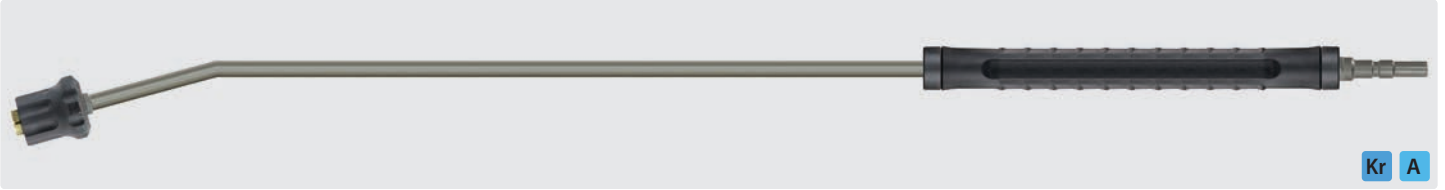


Kr A

Plug KW. Lance with insulation ST-9.9 and ST-51 adjustable nozzle. Max. 250 bar / 150 °C

R+M Nr.		ISO		M
511 505 910	1/4" F	330 mm	1,000 mm	stainless steel

R+M Nr.

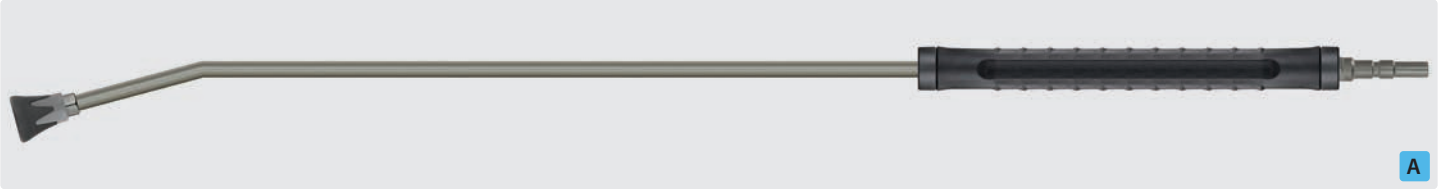


A

Plug KW. Lance with insulation ST-9.9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
511 505 901	1/8" F NPT	330 mm	1,000 mm	stainless steel

R+M Nr.

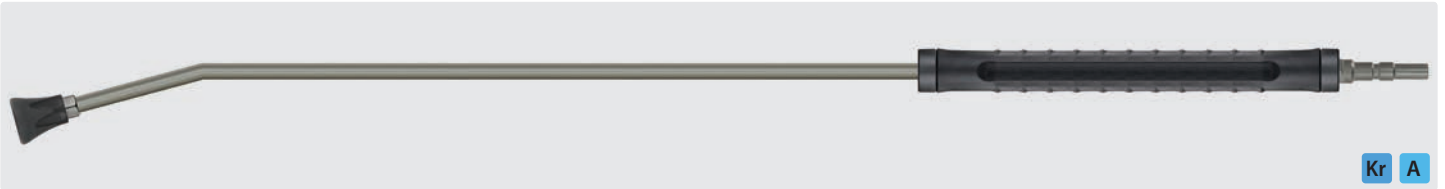


Kr A

Plug KW. Lance with insulation ST-9.9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
511 505 905	1/4" F NPT	330 mm	1,000 mm	stainless steel

R+M Nr.


ST-247 with insulation ST-9.9

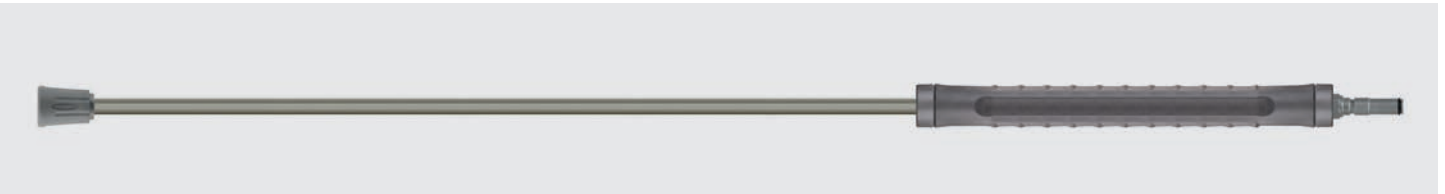

Plug ST-247. Lance with insulation ST-9.9 and **hydroblade**® nozzle protector without **hydroblade**® nozzles. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
514 524 700	hydroblade ®	330 mm	1.000 mm	stainless steel

R+M Nr.

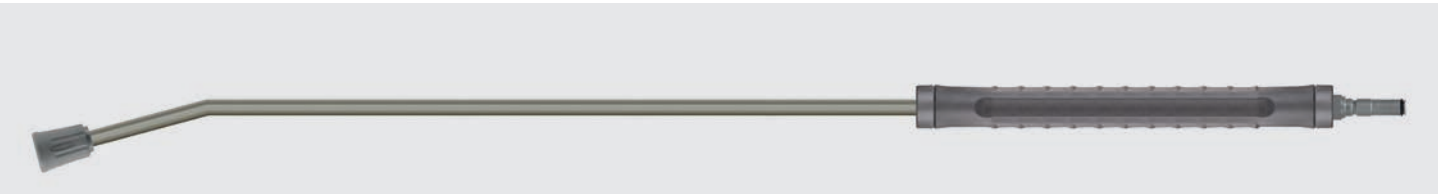

Plug ST-247. Lance with insulation ST-9.9 and **hydroblade**® nozzle protector without **hydroblade**® nozzles. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
514 524 701	hydroblade ®	330 mm	1.000 mm	stainless steel

R+M Nr.