


## Lances


### Tubes de lance ST-001

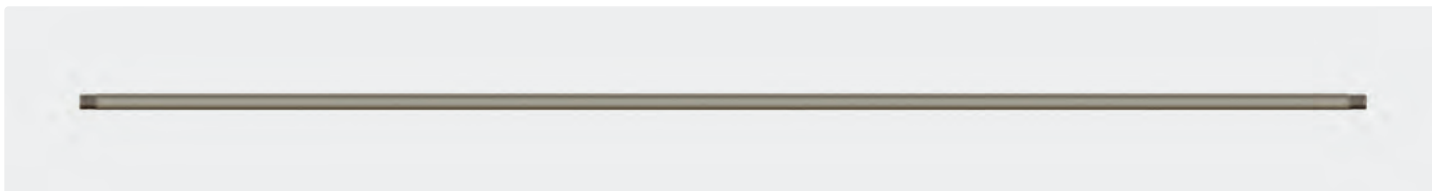

1/4" M. Tubes de lance avec filetages mâles. Max. 400 bar / 150 °C

R+M Nr.	⊙	↔	(M)
070 004 008	1/4" M	400 mm	inox
070 004 338	1/4" M	433 mm	inox
070 005 008	1/4" M	500 mm	inox
070 006 008	1/4" M	600 mm	inox
070 008 008	1/4" M	800 mm	inox
070 010 008	1/4" M	1.000 mm	inox
070 012 008	1/4" M	1.200 mm	inox
070 015 008	1/4" M	1.500 mm	inox
070 020 008	1/4" M	2.000 mm	inox


R+M Nr.	⊙	↔	(M)
070 000 076	1/4" M	400 mm	acier zingué
070 000 026	1/4" M	431 mm	acier zingué
070 000 030	1/4" M	500 mm	acier zingué
070 000 040	1/4" M	600 mm	acier zingué
070 000 050	1/4" M	800 mm	acier zingué
070 000 060	1/4" M	1.000 mm	acier zingué
070 000 070	1/4" M	1.200 mm	acier zingué
070 000 080	1/4" M	1.500 mm	acier zingué
070 000 090	1/4" M	2.000 mm	acier zingué

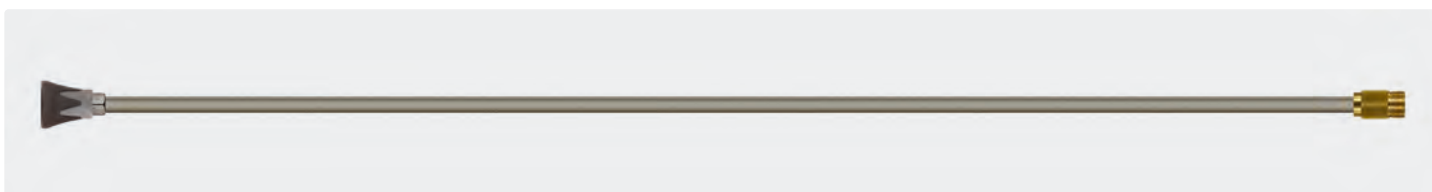

M22 M. Demi-lances avec porte-buse ST-10, livrées sans buse. Max. 400 bar / 150 °C

R+M Nr.	⊖	↔	(M)
512 903 9	1/4" F NPT	430 mm	inox
513 103 9	1/4" F NPT	500 mm	inox
513 203 9	1/4" F NPT	600 mm	inox
513 303 9	1/4" F NPT	800 mm	inox
513 403 9	1/4" F NPT	1.000 mm	inox

R+M Nr.	⊖	↔	(M)
512 903	1/4" F NPT	430 mm	acier zingué
513 103	1/4" F NPT	500 mm	acier zingué
513 203	1/4" F NPT	600 mm	acier zingué
513 303	1/4" F NPT	800 mm	acier zingué
513 403	1/4" F NPT	1.000 mm	acier zingué

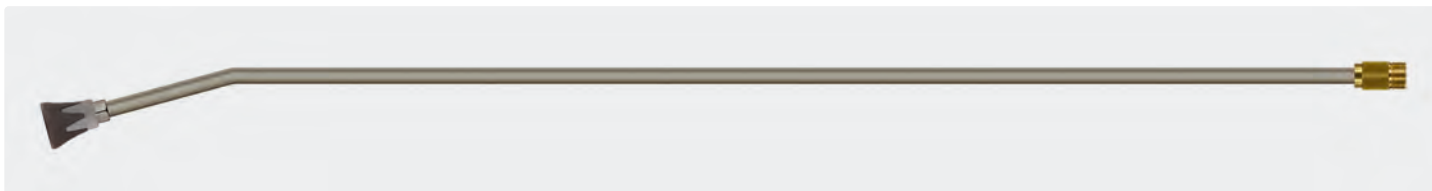

M22 M. Demi-lances coudées avec porte-buse ST-10, livrées sans buse. Max. 400 bar / 150 °C

R+M Nr.	⊖	↔	(M)
513 203 91	1/4" F NPT	600 mm	inox
513 303 91	1/4" F NPT	800 mm	inox
513 403 91	1/4" F NPT	1.000 mm	inox

R+M Nr.	⊖	↔	(M)
513 203 1	1/4" F NPT	600 mm	acier zingué
513 303 1	1/4" F NPT	800 mm	acier zingué
513 403 1	1/4" F NPT	1.000 mm	acier zingué

Symboles ⊖ sortie ISO isolation ↔ longueur (M) matériel (D) buse ⊙ filetage