


Lances

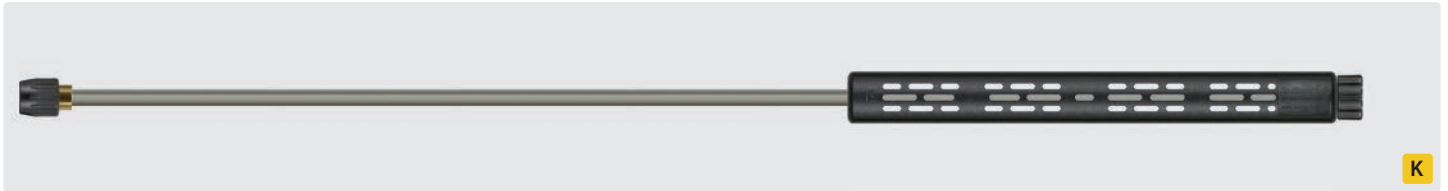


K

M22 F. Lance with vented handle ST-9 and nozzle protector without tip. Max. 400 bar / 150 °C

| R+M Nr. | ☉ | ISO | ↔ | (M) |
|---------|------------------|--------|----------|-----------------|
| 514 19 | nozzle protector | 380 mm | 500 mm | stainless steel |
| 514 29 | nozzle protector | 380 mm | 600 mm | stainless steel |
| 514 39 | nozzle protector | 380 mm | 800 mm | stainless steel |
| 514 59 | nozzle protector | 380 mm | 1,000 mm | stainless steel |
| 514 69 | nozzle protector | 380 mm | 1,200 mm | stainless steel |
| 514 79 | nozzle protector | 380 mm | 1,500 mm | stainless steel |
| 514 89 | nozzle protector | 760 mm | 2,000 mm | stainless steel |

| R+M Nr. | ☉ | ISO | ↔ | (M) |
|---------|------------------|--------|----------|-------------------|
| 514 10 | nozzle protector | 380 mm | 500 mm | zinc-plated steel |
| 514 20 | nozzle protector | 380 mm | 600 mm | zinc-plated steel |
| 514 30 | nozzle protector | 380 mm | 800 mm | zinc-plated steel |
| 514 50 | nozzle protector | 380 mm | 1,000 mm | zinc-plated steel |
| 514 60 | nozzle protector | 380 mm | 1,200 mm | zinc-plated steel |
| 514 70 | nozzle protector | 380 mm | 1,500 mm | zinc-plated steel |
| 514 80 | nozzle protector | 760 mm | 2,000 mm | zinc-plated steel |

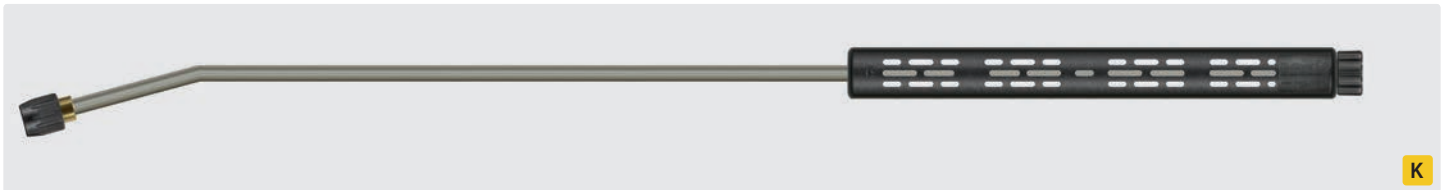


K

M22 F. Lance with vented handle ST-9 and nozzle protector without tip. Max. 400 bar / 150 °C

| R+M Nr. | ☉ | ISO | ↔ | (M) |
|---------|------------------|--------|----------|-----------------|
| 514 391 | nozzle protector | 380 mm | 800 mm | stainless steel |
| 514 591 | nozzle protector | 380 mm | 1,000 mm | stainless steel |
| 514 691 | nozzle protector | 380 mm | 1,200 mm | stainless steel |
| 514 791 | nozzle protector | 380 mm | 1,500 mm | stainless steel |
| 514 891 | nozzle protector | 760 mm | 2,000 mm | stainless steel |

| R+M Nr. | ☉ | ISO | ↔ | (M) |
|---------|------------------|--------|----------|-------------------|
| 514 301 | nozzle protector | 380 mm | 800 mm | zinc-plated steel |
| 514 501 | nozzle protector | 380 mm | 1,000 mm | zinc-plated steel |
| 514 601 | nozzle protector | 380 mm | 1,200 mm | zinc-plated steel |
| 514 701 | nozzle protector | 380 mm | 1,500 mm | zinc-plated steel |
| 514 801 | nozzle protector | 760 mm | 2,000 mm | zinc-plated steel |

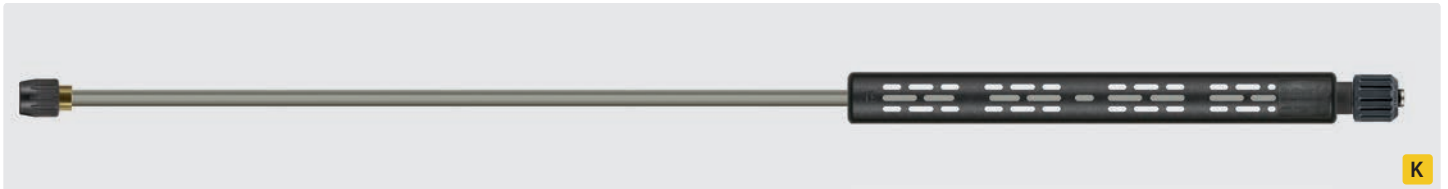


K

M22 F swivel. Lance with vented handle ST-9 and nozzle protector without tip. Max. 400 bar / 150 °C

| R+M Nr. | ☉ | ISO | ↔ | (M) |
|---------|------------------|--------|----------|-----------------|
| 514 119 | nozzle protector | 380 mm | 500 mm | stainless steel |
| 514 519 | nozzle protector | 380 mm | 1,000 mm | stainless steel |
| 514 719 | nozzle protector | 380 mm | 1,500 mm | stainless steel |
| 514 819 | nozzle protector | 760 mm | 2,000 mm | stainless steel |

| R+M Nr. | ☉ | ISO | ↔ | (M) |
|---------|------------------|--------|----------|-------------------|
| 514 11 | nozzle protector | 380 mm | 500 mm | zinc-plated steel |
| 514 510 | nozzle protector | 380 mm | 1,000 mm | zinc-plated steel |
| 514 71 | nozzle protector | 380 mm | 1,500 mm | zinc-plated steel |
| 514 81 | nozzle protector | 760 mm | 2,000 mm | zinc-plated steel |

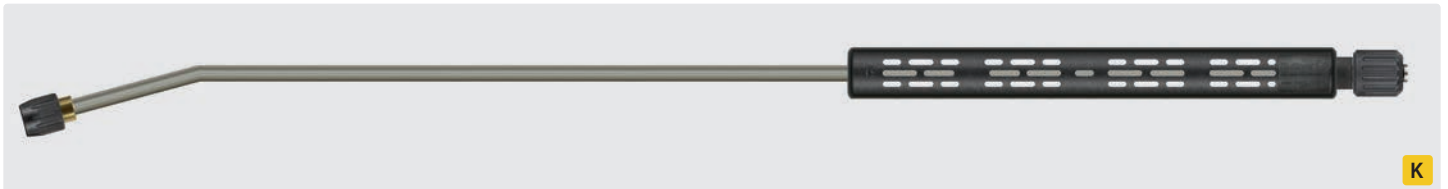

K

M22 F swivel. Lance with vented handle ST-9 and nozzle protector without tip. Max. 400 bar / 150 °C

| R+M Nr. | ☉ | ISO | ↔ | (M) |
|-----------|------------------|--------|----------|-----------------|
| 514 519 1 | nozzle protector | 380 mm | 1,000 mm | stainless steel |
| 514 719 1 | nozzle protector | 380 mm | 1,500 mm | stainless steel |
| 514 819 1 | nozzle protector | 760 mm | 2,000 mm | stainless steel |

| R+M Nr. | ☉ | ISO | ↔ | (M) |
|---------|------------------|--------|----------|-------------------|
| 514 511 | nozzle protector | 380 mm | 1,000 mm | zinc-plated steel |
| 514 711 | nozzle protector | 380 mm | 1,500 mm | zinc-plated steel |
| 514 811 | nozzle protector | 760 mm | 2,000 mm | zinc-plated steel |

Symbols ☉ outlet ↔ length (M) material ISO insulation