


Lances

ST-29 Cool & Compact

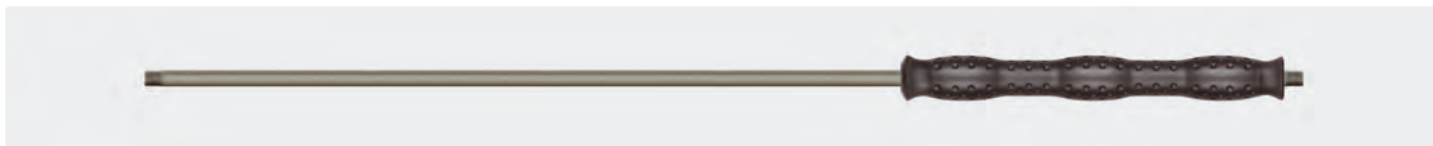


Lances avec manchon ST-29 Cool & Compact. Manchon ergonomique préformé hermétique en surface. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	M
200 029 305	1/4" M	300 mm	500 mm	inox
200 029 306	1/4" M	300 mm	600 mm	inox
200 029 307	1/4" M	300 mm	700 mm	inox
200 029 309	1/4" M	300 mm	900 mm	inox
200 029 410	1/4" M	400 mm	1.000 mm	inox
200 029 312 *	1/4" M	300 mm	1.200 mm	inox
200 029 412	1/4" M	400 mm	1.200 mm	inox

R+M Nr.


ST-007

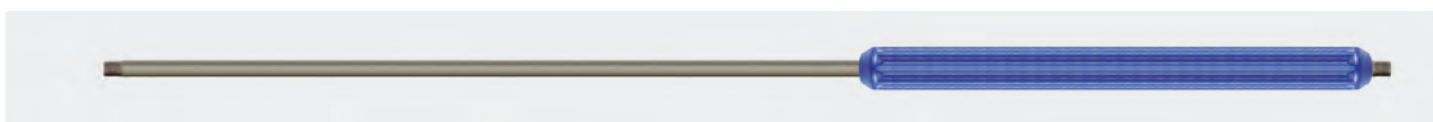

1/4" M. Lances surmoulées. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	M
070 005 010	1/4" M	300 mm	500 mm	inox
070 010 010	1/4" M	400 mm	1.000 mm	inox


R+M Nr.



1/4" M. Lances surmoulées avec porte-buses ST-10, livrées sans buse. Max. 400 bar / 150 °C

R+M Nr.	⊕	ISO	↔	M
512 149 3	1/4" F NPT	300 mm	500 mm	inox
512 449 3	1/4" F NPT	400 mm	1.000 mm	inox

R+M Nr.




1/4" M. Lance surmoulée coudée avec porte-buses ST-10, livrée sans buse. Max. 400 bar / 150 °C

R+M Nr.	⊕	ISO	↔	M
512 449 31	1/4" F NPT	400 mm	1.000 mm	inox

R+M Nr.

Lances "U"

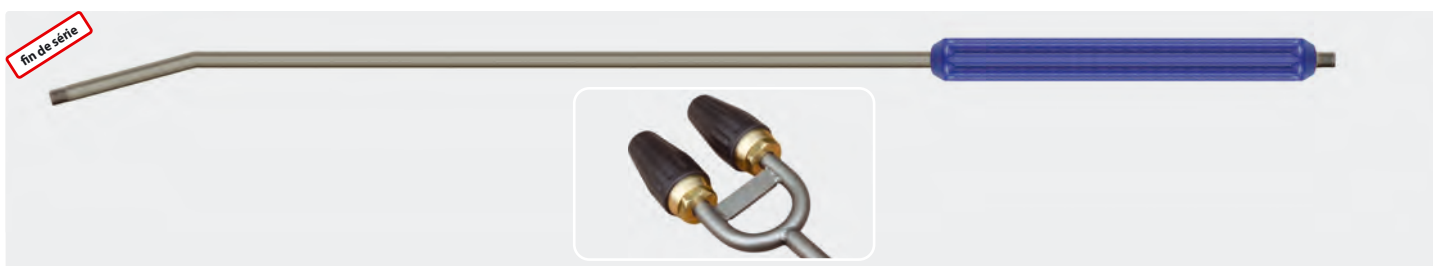

1/4" M. Lance surmoulée coudée. Max. 250 bar / 150 °C

R+M Nr.	⊕	ISO	↔	M
070 009 011	2 x 1/4" M	300 mm	900 mm	inox

R+M Nr.

* fin de série

Symboles ⊕ sortie ↔ longueur M matériel ISO isolation ⊙ filetage