

easywash365+ lances by Suttner




Stainless steel. Lance with **easywash365+** handle and nozzle protector ST-10 without nozzle. Max. 350 bar / 45 l/min / 150 °C

R+M Nr.	☺	☹	↔	Ⓒ
515 65	1/4" F NPT		500 mm	1/4" M




Lance with moulded handle Cool & Compact, **easywash365+** handle, air injector and wash brush (bristles 60 mm). Max. 50 °C

R+M Nr.	ISO	☺	↔	Ⓒ
200 009 670	700 mm	wash brush	900 mm	1/4" M
200 009 675	700 mm	wash brush	1,200 mm	1/4" M

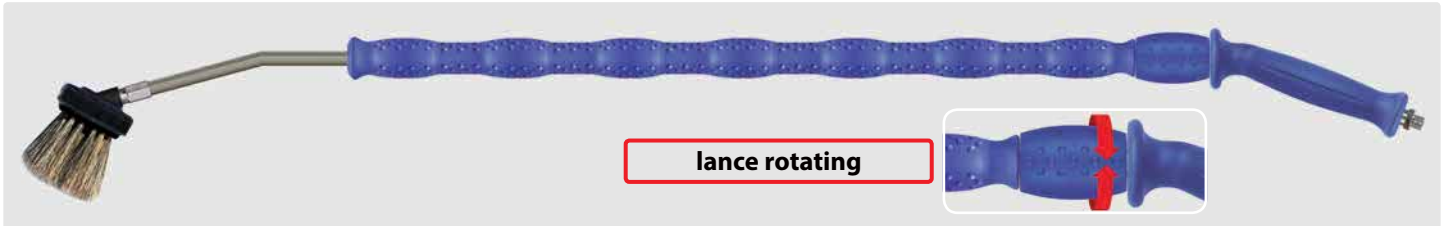

lance rotating



Lance with moulded handle Cool & Compact, **easywash365+** handle, **easywash365+** lance swivel, air injector and wash brush (bristles 60 mm). Max. 50 °C

R+M Nr.	ISO	☺	↔	Ⓒ
200 009 673	700 mm	wash brush	900 mm	1/4" M
200 009 678	700 mm	wash brush	1,200 mm	1/4" M

Self-service lances



Self-service lances with brush longitudinal. Brush with nozzle protector for nozzle 1/8" M. Without high pressure nozzle

R+M Nr.	Ⓒ
523 960	1/8" M
523 961	1/4" M
523 962	M22 F long nipple
523 963	M22 M



Original Vorwerk. Brush hog hair. A= 260. B= 230 x 80 mm.

R+M Nr.	C
523 72	60 mm

A = appr. width B = frame for brush C = appr. length of bristles

Symbols ☺ inlet ☹ outlet ↔ length ISO insulation