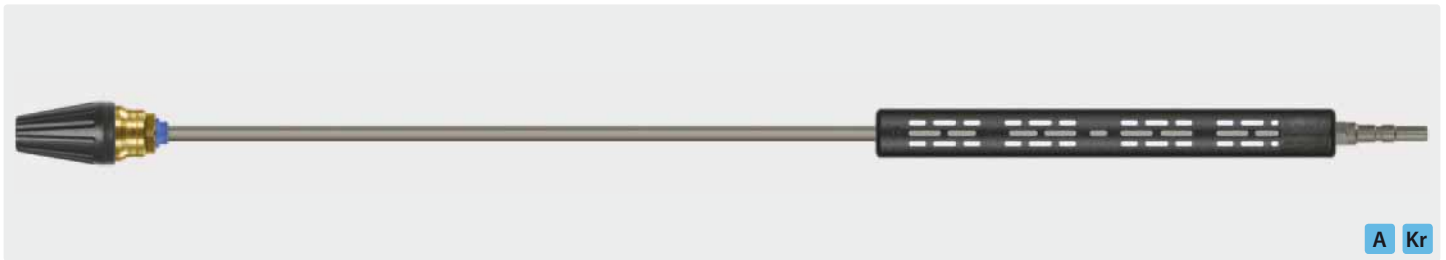


Suttner rotating nozzles with ceramic insert



A Kr












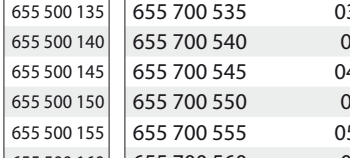



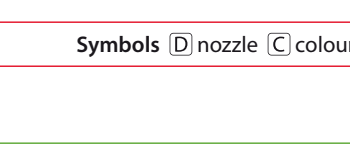






Plug KW. Lance with vented handle ST-9 380 mm and rotating nozzle ST-458.1. Spray angle 20°. 200 - 400 bar. Max. 100 °C

R+M Nr.	D	C	↔	M*
653 835 014	035	purple	1,000 mm	zinc-plated steel
653 840 014	04	brown	1,000 mm	zinc-plated steel
653 845 014	045	light green	1,000 mm	zinc-plated steel
653 850 014	05	black	1,000 mm	zinc-plated steel
653 855 014	055	light blue	1,000 mm	zinc-plated steel
653 860 014	06	red	1,000 mm	zinc-plated steel
653 865 014	065	nature	1,000 mm	zinc-plated steel
653 870 014	07	pink	1,000 mm	zinc-plated steel
653 880 014	08	orange	1,000 mm	zinc-plated steel

Plug KW. Lance with vented handle ST-9 380 mm and rotating nozzle ST-458.1. Spray angle 20°. 200 - 400 bar. Max. 100 °C

R+M Nr.	D	C	↔	M*
653 835 023	035	purple	1,000 mm	stainless steel
653 840 023	04	brown	1,000 mm	stainless steel
653 845 023	045	light green	1,000 mm	stainless steel
653 850 023	05	black	1,000 mm	stainless steel
653 855 023	055	light blue	1,000 mm	stainless steel
653 860 023	06	red	1,000 mm	stainless steel
653 865 023	065	nature	1,000 mm	stainless steel
653 870 023	07	pink	1,000 mm	stainless steel
653 880 023	08	orange	1,000 mm	stainless steel

Cleantecs rotating nozzles with carbide insert

HM 500		HM 500		HM 500		HM 500		HM 500		HM 500		HM 700		HM 1000		HM 1000																			
	Kit HM 500		Kit HM 500		Kit HM 500		Kit HM 500		Kit HM 700		Kit HM 1000																								
G9/16. Spray angle 20°. Max. 500 bar / 90 °C		M20x1. Spray angle 20°. Max. 500 bar / 90 °C		M20x1. Spray angle 20°. Max. 500 bar / 90 °C		1/4" IG. Spray angle 20°. Max. 500 bar / 90 °C		1/4" IG. Spray angle 20°. Max. 700 bar / 90 °C. Delivery time of approx. 1 week		1/4" F. Spray angle 20°. Max. 1,000 bar / 90 °C. Delivery time of approx. 1 week																									
R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D	R+M Nr.	D						
655 500 630	03	655 500 130		655 500 640	028	655 500 130		655 500 650	05	655 500 150		655 500 520	02	655 500 120		655 700 520	02	655 700 120		655 100 520	02	655 100 120		655 500 525	025	655 500 125		655 700 525	025	655 700 125		655 100 525	025	655 100 125	
655 500 530	03	655 500 130		655 700 530	03	655 700 130		655 100 530	03	655 100 130		655 500 535	035	655 500 135		655 700 535	035	655 700 135		655 100 535	035	655 100 135		655 500 540	04	655 500 140		655 700 540	04	655 700 140		655 100 540	04	655 100 140	
655 500 545	045	655 500 145		655 700 545	045	655 700 145		655 100 545	045	655 100 145		655 500 550	05	655 500 150		655 700 550	05	655 700 150		655 100 550	05	655 100 150		655 500 555	055	655 500 155		655 700 555	055	655 700 155		655 100 555	055	655 100 155	
655 500 560	06	655 500 160		655 700 560	06	655 700 160		655 100 560	06	655 100 160		655 500 570	07	655 500 170		655 700 570	07	655 700 170		655 100 570	07	655 100 170													

* lance

Symbols **D** nozzle **C** colour coding **↔** length **M** material