


hydroblade® Nozzle System

new

Set consists of nozzle holder, 6 equal nozzles and O-rings. Max. 400 bar / 150 °C

- » Strong and uniform flat jet with extraordinarily narrow jet depth
- » Application: High pressure and steam jet cleaning
- » Suitable for existing systems
- » Stainless steel

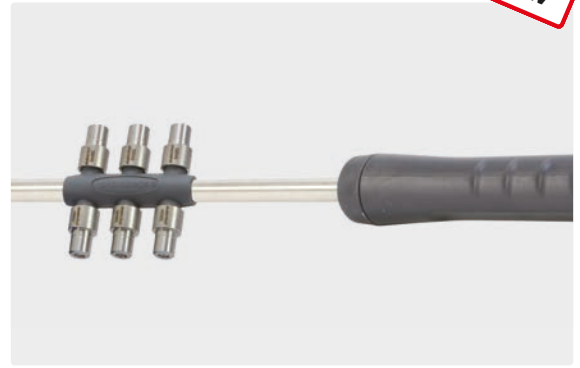

0°

15°

25°

40°

ⓓ
034
040
045
050
055
060
065
070
075
080
090
100



R+M Nr.
126 100 040
126 100 045
126 100 050
126 100 055
126 100 060
126 100 075

R+M Nr.
126 015 034
126 015 040
126 015 045
126 015 050
126 015 055
126 015 060
126 015 070
126 015 075
126 015 080

R+M Nr.
126 025 034
126 025 040
126 025 045
126 025 050
126 025 055
126 025 060
126 025 065
126 025 070
126 025 075
126 025 080
126 025 090
126 025 100

R+M Nr.
126 040 040
126 040 045
126 040 050
126 040 055
126 040 060
126 040 070

hydroblade® Benchmark

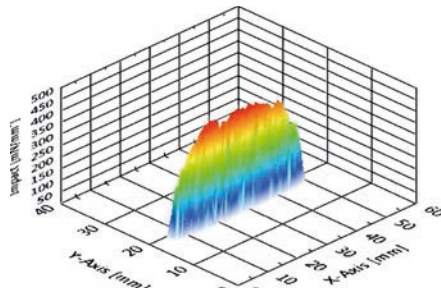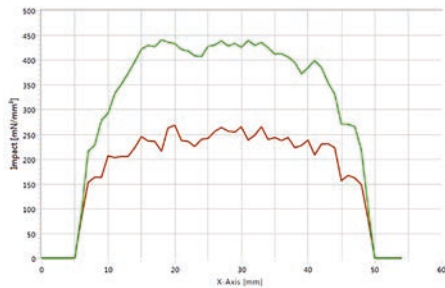

hydroblade® flat jet nozzles feature a homogenous liquid and pressure distribution. Highly efficient jets are achieved with spray angles of up to 40°. Thanks to the flow geometry of the nozzles, a compact and controlled jet is generated.



The hydroblade® set consists of nozzle holder, 6 equal nozzles, and corresponding O-rings.

Symbols ⓓ nozzle