

Twin and adjustable nozzle holder

ST-56 twin nozzle holder




R+M Nr.					
200 056 500	2 x 1/4" F	1/4" F			brass

ST-56 twin nozzle holder



R+M Nr.					
656 51	2 x 1/4" F	M18 F			

Functional principle of a twin nozzle holder

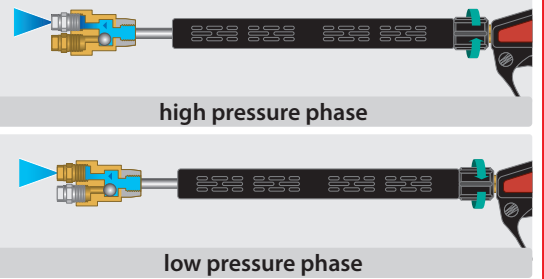

ST-52.1 Variopress



Stainless steel axle.
Max. 350 bar/150° C

R+M Nr.					
200 052 605	1/4" F	1/4" M			

Coupling KW with ST-52.1 Variopress



Coupling KW : 1/4" M.
Brass / stainless steel

R+M Nr.					
559 264					

ST-58 change-over valves



R+M Nr.					
200 058 600	1/4" F	1/4" F			



Rep. Kit

R+M Nr.					
200 058 300					

Mini adjustable nozzles



R+M Nr.					
657 20	1/4" F	1/4" F			

R+M adjustable nozzles




R+M Nr.					
657 30	1/4" F	1/4" F			

ST-51 adjustable nozzles




R+M Nr.					
200 051 530	1/4" F	1/4" F			

Functional principle of a adjustable nozzle

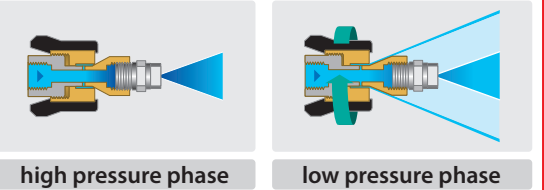

Complete lances

90° bended lances

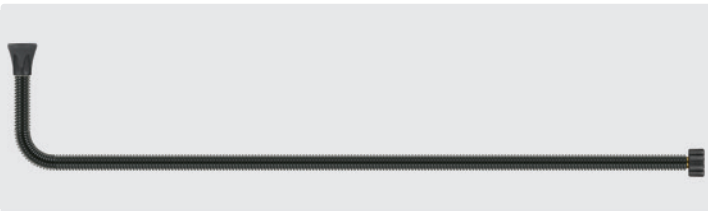

Lance with nozzle protector ST-10 without hp nozzle. Height 190 mm

R+M Nr.					
515 01	1/4" F NPT	900 mm	M22 F		zinc-plated steel

WC / gutter lances



Lance with adjustable nozzle without high pressure nozzle

R+M Nr.					
513 112	1/4" F	500 mm	M22 F		zinc-plated steel

Symbols inlet outlet length nozzle material