

Gun extensions with handle

1/4" M. Lance with handle and insulation ST-28.2/ST-29.2 Cool & Compact. Max. 400 bar / 150 °C



R+M Nr.	☉	ISO	↔	M
200 028 204	1/4" M	400 mm	430 mm	zinc-plated
200 029 204	1/4" M	400 mm	430 mm	stainless steel

R+M Nr.	☉	ISO	↔	M
200 028 210	1/4" M	400 mm	1,000 mm	zinc-plated
200 029 210	1/4" M	400 mm	1,000 mm	stainless steel

Insulations for lances

Insulations ST-9.9



Insulation 330 mm. Suitable for 1/4" lances. Max. 150 °C

R+M Nr.	200 009 935
---------	-------------

Vented handles ST-9



Vented handle 380 mm. Suitable for 1/4" lances. Max. 150 °C


R+M Nr.	200 009 510
---------	-------------



Insulation 330 mm. Suitable for 1/4" lances. Max. 150 °C

R+M Nr.	200 009 936
---------	-------------

Adapter for lances



M18 M : TR20 F. K-Lock 8. Brass.
Max. 400 bar / 150 °C

R+M Nr.	565 686
---------	---------


K

Lance holder, two-piece



For lances with R + M / Suttner insulation and connection: Plug nipple or male thread.

R+M Nr.	105 610 050
---------	-------------

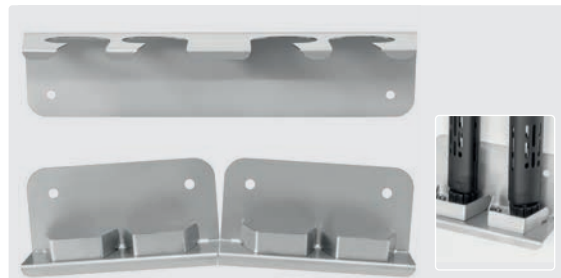

For all lances with R + M / Suttner insulation. With 4 lance fixations for mounting for connection: hand screw coupling or female thread

R+M Nr.	105 610 055
---------	-------------



Lance fixation for lances with screw coupling or female thread. For individual retrofitting

R+M Nr.	105 610 004
---------	-------------

Symbols ☉ outlet ISO insulation ↔ length M material