

Water intake filters

R+M filter



Aluminium. Complete with screen (stainless steel). 300 microns. Max. 10 bar / 60 l/min / 80 °C

R+M Nr.	⊗	⊖	↔	↑
730 504	1/2" F	1/2" M	83	34



Screen.
Stainless steel

R+M Nr.	microns
730 504 03	300

ST-33



Complete with screen (stainless steel). 400 micron. Max. 10 bar / 60 l/min / 60 °C

R+M Nr.	⊗	⊖	↔	↑
200 033 540	1/2" F	1/2" M	69	38
200 033 550	3/4" M	3/4" F	97	43



Screen.
Stainless steel

R+M Nr.	microns
120 000 765	400

ST-33



Complete with filter fine core washable (stainless steel and plastic). 95 mm

↑ 112 mm. Max. 6 bar / 60 °C / 50 l/min

R+M Nr.	⊗	⊖	microns
200 033 700	3/4" F	3/4" M	50
200 033 705	1/2" F	1/2" M	125



Filter fine core washable.
Stainless steel + plastic

R+M Nr.	microns
020 001 735	50
020 001 737	125

ST-33



Complete with filter fine core washable (stainless steel and plastic). 50 microns. Max. 6 bar / 60 °C / 50 l/min

R+M Nr.	⊗	⊖	↑
200 033 900	3/4" F	3/4" M	141



Filter fine core washable.
Stainless steel + plastic

R+M Nr.	microns
020 000 670	50

Water filter 3"



Complete with screen (plastic). 60 micron. Max. 10 bar / 50 l/min / 50 °C

R+M Nr.	⊗	⊖	↑
734 40	3/4" M	3/4" F	123



Screen.
Plastic

R+M Nr.	microns
734 703 060	60

Y-filter



Complete with screen (stainless steel). 500 micron. Max. 10 bar / 60 l/min / 60 °C

R+M Nr.	⊗	⊖	↑
732 038	3/8" F	3/8" F	58
732 012	1/2" F	1/2" F	58
732 034	3/4" F	3/4" F	70



Screen. Stainless steel.
500 microns

R+M Nr.	TYP
732 038 11	3/8"
732 038 11	1/2"
732 034 11	3/4"


The higher the number of microns the more coarsely meshed are the meshes: 500 microns = coarse . 50 microns = fine

Float tanks

Suttner float tank



R+M Nr.	⊗	↑
020 000 780	3/4"	7 l

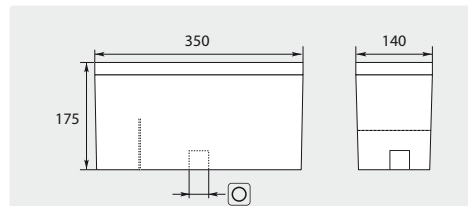

Float tank with intake spray wall.
Avoids air circulation

Cover Suttner float tank



R+M Nr.
020 000 800

Symbols ⊗ inner diameter ⊗ inlet ⊖ outlet ↔ length ↑ height TYP type ⊗ thread ↑ volume ↔ flow