

Роторные форсунки с керамической вставкой Suttner

ST-357.1



1/4" IG. Угол распыления 20°.
100 - 250 bar. Макс. 100 °C



M18 IG. Угол распыления 20°.
100 - 250 bar. Макс. 100 °C




1/8" AG. Угол распыления 20°.
100 - 250 bar. Макс. 100 °C



Kit ST-357.1
100 - 250 bar. Макс. 100 °C

Адаптер TR20

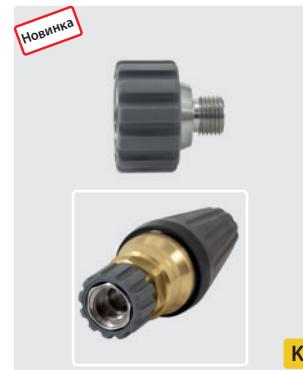

TR20 IG : 1/4" AG.
Нерж. сталь.
Макс. 400 bar / 150° C

R+M Nr.
565 685 19

ST-458.1



1/4" IG. Угол распыления 20°.
200 - 400 bar. Макс. 100 °C



M18 IG. Угол распыления 20°.
200 - 400 bar. Макс. 100 °C



1/8" AG. Угол распыления 20°.
200 - 400 bar. Макс. 100 °C



Kit ST-458.1

R+M Nr.	D
200 458 630	03
200 458 635	035
200 458 640	04
200 458 645	045
200 458 650	05
200 458 655	055
200 458 660	06
200 458 665	065
200 458 670	07
200 458 680	08
200 458 690	09
200 458 610	100

R+M Nr.	D
200 458 331	03
200 458 335	035
200 458 340	04
200 458 345	045
200 458 350	05
200 458 355	055
200 458 360	06
200 458 365	065
200 458 370	07
200 458 380	08
200 458 390	09
200 458 310	100

R+M Nr.	D
200 458 430	03
200 458 435	035
200 458 440	04
200 458 445	045
200 458 450	05
200 458 455	055
200 458 460	06
200 458 465	065
200 458 470	07
200 458 480	08
200 458 490	09
200 458 410	100

R+M Nr.
200 458 230
200 458 235
200 458 240
200 458 245
200 458 250
200 458 255
200 458 260
200 458 265
200 458 270
200 458 280
200 458 190
200 458 110