


## Schwimmerventile


AK mit Ball horizontal



Kunststoff.  
Druck 0,3 - 10 bar.  
Max. 22 l/min / 60 °C

R+M Nr.	↺	↻	⊙
701 40*	3/8" AG	3/4" AG	10 mm
701 401*	1/2" AG	3/4" AG	10 mm
701 402	3/4" AG	3/4" AG	10 mm


AK mit Ball vertikal

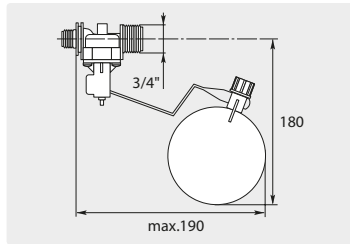

Kunststoff.  
Druck 0,3 - 10 bar.  
Max. 22 l/min / 60 °C

R+M Nr.	↺	↻	⊙
701 404	3/8" AG	3/4" AG	10 mm


AK mit PE-Schwimmer



PE-Schwimmer.  
Druck 0,3 - 10 bar.  
Max. 22 l/min / 60 °C

R+M Nr.	↺	↻	⊙
701 405	3/4" AG	3/4" AG	10 mm


AK mit PE-Schwimmer

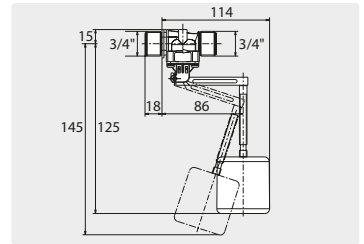

PE-Schwimmer.  
Druck 0,3 - 10 bar.  
Max. 22 l/min / 60 °C

R+M Nr.	↺	↻	⊙
701 408	3/4" AG	3/4" AG	10 mm

AK mit Ball



Kunststoff.  
Druck 0,3 - 10 bar.  
Max. 22 l/min / 60 °C

R+M Nr.	↺	↻	⊙
701 403	3/4" AG	3/4" AG	10 mm

Zubehör AK



Schwimmerball

R+M Nr.	701 43
---------	--------



Membrane

R+M Nr.	701 42
---------	--------

Zubehör AK-Ventile



Befestigungsflansch


R+M Nr.	701 41
---------	--------



Schlauchtülle DN 13 mm

R+M Nr.	711 60	3/4" IG
---------	--------	---------


ST-8 mit Ball



Messing / Kunststoff.  
Max. 10 bar / 22 l/min / 60 °C

R+M Nr.	↺	⊙
200 008 5201/2"	IG12 mm	

PEKI ohne Ball

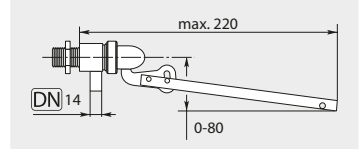

3/8" AG. Messing. Max. 10 bar / 80 °C

R+M Nr.	↺	⊙
701 00	16 l/min	8 mm
701 05	30 l/min	12 mm

Schwimmerball ST-8



R+M Nr.	TYP
030 000 180	Schwimmer
020 000 610	Schraube

Schwimmerball PEKI



R+M Nr.	701 35
---------	--------

Dichtsatz PEKI



R+M Nr.	701 001
---------	---------

Schwimmerschalter LS809-51



Kunststoff. Kabellänge 500 mm.  
2-adrig. 250 V / 1 A / 70 W.  
-30 °C - +105 °C

R+M Nr.	701 880 951
---------	-------------

Kunststoff



Messing / Kunststoff. 3/4" AG.  
DN 9,5. Max. 60 °C

R+M Nr.	701 500 100
---------	-------------

\* Restposten