


## Float valves


AK with ball horizontal



Plastic. Pressure 0.3 - 10 bar.  
Max. 22 l/min / 60 °C

|         |        |        |       |
|---------|--------|--------|-------|
| R+M Nr. |        |        |       |
| 701 402 | 3/4" M | 3/4" M | 10 mm |


AK with ball vertical



Plastic. Pressure 0.3 - 10 bar.  
Max. 22 l/min / 60 °C

|         |        |        |       |
|---------|--------|--------|-------|
| R+M Nr. |        |        |       |
| 701 404 | 3/8" M | 3/4" M | 10 mm |


AK with PE float



PE float. Pressure 0.3 - 10 bar.  
Max. 22 l/min / 60 °C

|         |        |        |       |
|---------|--------|--------|-------|
| R+M Nr. |        |        |       |
| 701 405 | 3/4" M | 3/4" M | 10 mm |


AK with PE float

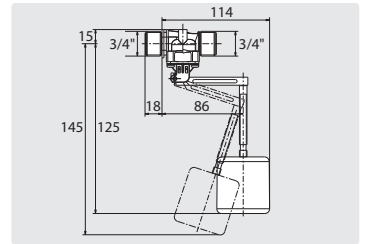

PE float. Pressure 0.3 - 10 bar.  
Max. 22 l/min / 60 °C

|         |        |        |       |
|---------|--------|--------|-------|
| R+M Nr. |        |        |       |
| 701 408 | 3/4" M | 3/4" M | 10 mm |


AK with ball



Plastic. Pressure 0.3 - 10 bar.  
Max. 22 l/min / 60 °C

|         |        |        |       |
|---------|--------|--------|-------|
| R+M Nr. |        |        |       |
| 701 403 | 3/4" M | 3/4" M | 10 mm |

Accessories AK



Ball

R+M Nr.  
701 43

Membrane

R+M Nr.  
701 42

Accessories AK valves




Clamp

R+M Nr.  
701 41

Hose tail DN 13 mm

R+M Nr.  
711 60 3/4" F

ST-8 with ball



Brass / plastic.  
Max. 10 bar / 22 l/min / 60 °C

|             |        |       |
|-------------|--------|-------|
| R+M Nr.     |        |       |
| 200 008 520 | 1/2" F | 12 mm |

Ball ST-8



|             |         |
|-------------|---------|
| R+M Nr.     | TYP     |
| 030 000 180 | swimmer |
| 020 000 610 | screw   |


Plastic



Brass / plastic. 3/4" M.  
DN 9.5. Max. 60 °C

|             |  |
|-------------|--|
| R+M Nr.     |  |
| 701 500 100 |  |

PEKI without ball

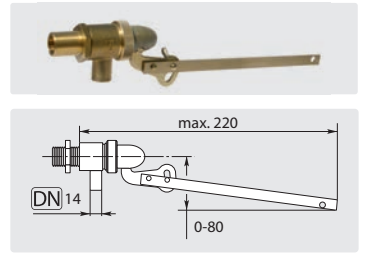

3/8" M. Brass. Max. 10 bar / 85 °C

|         |          |       |
|---------|----------|-------|
| R+M Nr. |          |       |
| 701 00  | 16 l/min | 8 mm  |
| 701 05  | 30 l/min | 12 mm |

Ball PEKI



Max. 60 °C

|         |  |
|---------|--|
| R+M Nr. |  |
| 701 35  |  |



Stainless steel. 85 °C. Suitable for 701 05

|         |  |
|---------|--|
| R+M Nr. |  |
| 701 39  |  |

Seal kit PEKI



|         |  |
|---------|--|
| R+M Nr. |  |
| 701 001 |  |

Level sensor LS809-51



Plastic. Cable length 500 mm. 2-core cable. 250 V / 1 A / 70 W. -30 °C - +105 °C

|             |  |
|-------------|--|
| R+M Nr.     |  |
| 701 880 951 |  |