

R+M / Suttner high-pressure telescopic lances

- » Light and handy. Infinitely extendable.
- » **Non-slip foam material insulation, 530 mm.**
- » Length easily adjustable. Adjustable from 2.3 m to 7.4 m.
- » Lance with embedded high pressure hose and mounted Suttner gun **ST-602**. Lance without high pressure nozzle.
- » Max. 275 bar / 100 °C

**Safe handling thanks to the integrated pole holder
on the ST-602 spray gun and long soft handle
for a comfortable hold with insulation.**



Nozzle guard with angled extension tube



ST-10 / 1/4" F NPT with extension tube angled



1/4" M with extension tube; Length 150 mm




R+M Nr.	⊞	M	⊞	↔	⊞
525 087 105	2.8 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	2.55 - 3.80 m	M22 M
525 087 110	2.8 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	2.55 - 3.80 m	3/8" F
525 087 115	2.7 kg	Aluminum / Fiberglass	1/4" M with extension	2.45 - 3.70 m	3/8" F



R+M Nr.	⊞	M	⊞	↔	⊞
525 087 205	3.4 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	2.55 - 5.75 m	M22 M
525 087 210	3.4 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	2.55 - 5.75 m	3/8" F
525 087 215	3.3 kg	Aluminum / Fiberglass	1/4" M with extension	2.45 - 5.65 m	3/8" F



R+M Nr.	⊞	M	⊞	↔	⊞
525 087 305	4.1 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	3.20 - 7.80 m	M22 M
525 087 310	4.1 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	3.20 - 7.80 m	3/8" F
525 087 315	4.0 kg	Aluminum / Fiberglass	1/4" M with extension	3.10 - 7.70 m	3/8" F

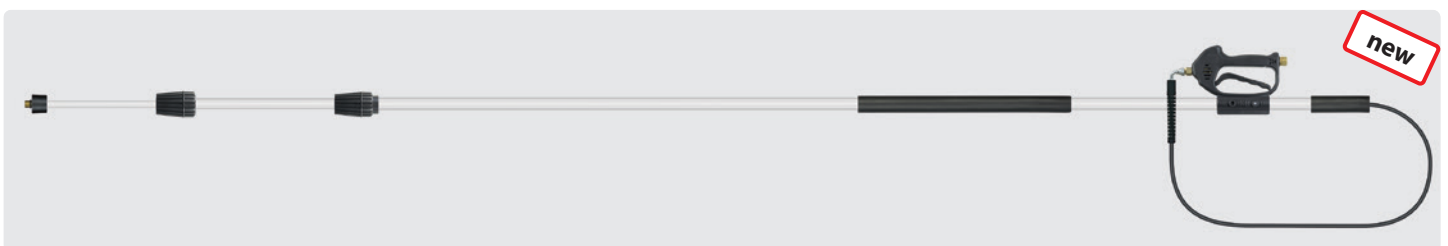

R+M Nr.	⊞	M	⊞	↔	⊞
525 087 405	4.0 kg	Aluminum	Nozzle protector without tip nozzle with angled extension	3.20 - 7.55 m	M22 M
525 087 410	4.0 kg	Aluminium	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	3.20 - 7.55 m	3/8" F
525 087 415	3.9 kg	Aluminium	1/4" M with extension	3.10 - 7.45 m	3/8" F