

### turbodevil - our new turbodevil floor cleaner series

#### turbodevil – BASIC

- » Especially designed for professional cleaning applications
- » **Max. 60 °C. 1,000 r.p.m. at 3 - 60 °C**
- » Completely stainless design
- » Heat-resistant all around protection ensures a safe handling by protection against splashes and stones
- » The precision rotor arm is counterbalanced, precisely equilibrated and welded by robots
- » Low vibration and reliable running
- » Suitable for applications up to about 150 annual operation hours are guaranteed

#### Surface cleaner TD 300 BASIC

#### Surface cleaner TD 410 BASIC



Surface cleaner with a newly developed swivel with pivoting inlet for high revolutions per minute. The bending of the swivel is variably adjustable thus making an easy cleaning of floors and walls possible. 3 industrial castors (60 mm). 2 nozzles 1/4" M are required.

Max. 1,800 l/h / 60 °C. Max. 275 bar

| R+M Nr.     | Ø      | ⊕      | R+M Nr.     | Ø      | ⊕      |
|-------------|--------|--------|-------------|--------|--------|
| 521 030 300 | 300 mm | 1/4" F | 521 042 300 | 410 mm | 1/4" F |

#### Surface cleaner TD 410 BASIC



**Swivel:**  
With triple bearing system

ST-2600  
**LTF**

We recommend using the gun ST-2600 with patented LTF technology.

Surface cleaner with foldable handle bar for space saving and reasonable transport. Swivel with triple bearing system. 3 industrial castors (60 mm). 2 nozzles 1/4" M are required.

Max. 1,800 l/h / 60 °C. Max. 275 bar

| R+M Nr.     | Ø      | ⊕      | P            |
|-------------|--------|--------|--------------|
| 521 042 350 | 410 mm | 1/4" F | max. 275 bar |

**Symbols** ⊕ inlet P pressure Ø diameter



#### Newly developed:


Swivel for high revolutions with pivoting inlet




**3 or 4 industrial castors (60 mm):**  
Easy and flexible steering



**Precision rotor:**  
Welded by robots



#### Surface cleaner TD 520 BASIC

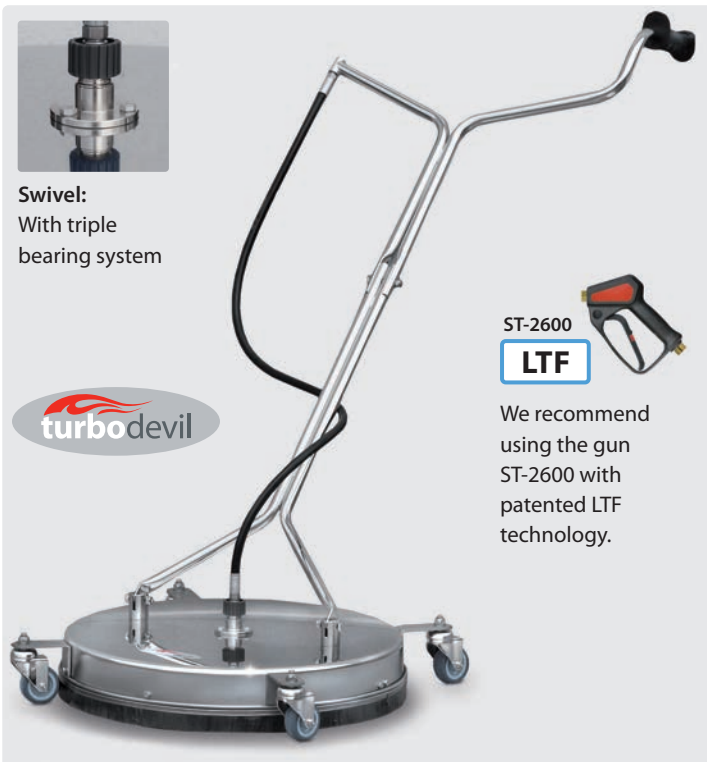

**Swivel:**  
With triple bearing system

ST-2600  
**LTF**

We recommend using the gun ST-2600 with patented LTF technology.

Surface cleaner with foldable handle bar for space saving and reasonable transport. Swivel with triple bearing system. 4 industrial castors (60 mm). 2 nozzles 1/4" M are required.

Max. 2,400 l/h / 60 °C

| R+M Nr.     | Ø      | ⊕       | P            | incl.          |
|-------------|--------|---------|--------------|----------------|
| 521 052 300 | 520 mm | 1/4" F  | max. 275 bar | –              |
| 521 052 301 | 520 mm | 3/8" F  | max. 275 bar | ST-2600        |
| 521 052 304 | 520 mm | 3/8" F  | max. 275 bar | ST-2600 swivel |
| 521 052 302 | 520 mm | M22 F   | max. 275 bar | –              |
| 521 052 303 | 520 mm | Plug KW | max. 275 bar | –              |