


## turbodevil - our new turbodevil floor cleaner series

### Surface cleaner TD 750 INDUSTRIAL



**High performance swivel joint:**  
For maximum stress with a longer lifetime

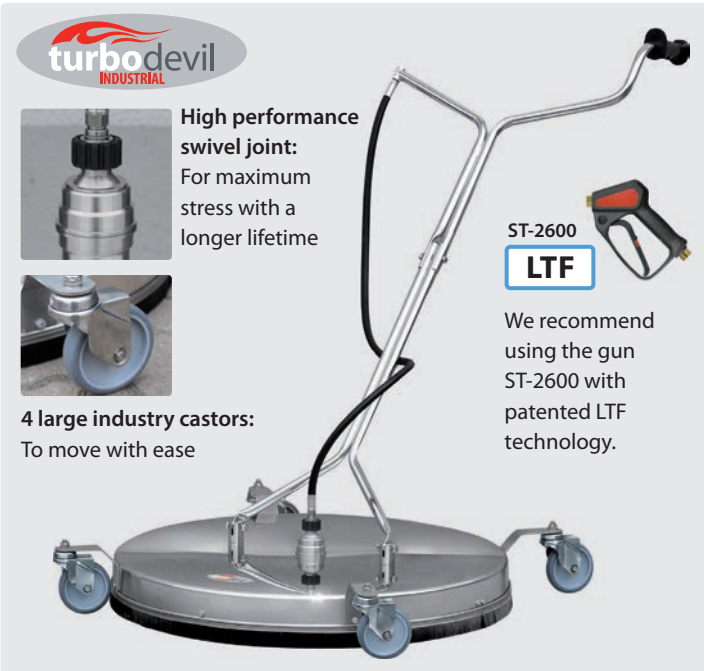

**4 large industry castors:**  
To move with ease

ST-2600

**LTF**

We recommend using the gun ST-2600 with patented LTF technology.



**Lug:** The underside of the connecting tube remains on the handle



**Space-saving:**  
Divisible fork

### Accessories for TD 300 & TD 410 & TD 410 INDUSTRIAL



Lance ST-007. 1/4" M : Plug KW.  
Stainless steel 1,000 mm

**R+M Nr.**  
512 495 90




Adapter. 1/4" M : M18 F.  
Stainless steel

**R+M Nr.**  
519 70

### High pressure nozzles

1/4" M NPT, 15 °



Lance extension. 1/4" M : M22 M.  
Stainless steel 500 mm

**R+M Nr.**  
513 129



Impact = 100 %

| D   | R+M Nr. |
|-----|---------|
| 02  | 613 05  |
| 025 | 613 07  |
| 03  | 613 10  |
| 04  | 613 30  |
| 045 | 613 40  |
| 05  | 613 50  |

Completely stainless steel. With reinforced hood and divisible fork. High performance swivel, stainless steel. Precision rotor arm welded by robots. 4 industrial castors (100 mm). 3 nozzles 1/4" M are required. Max. 2,400 l/h / 120 °C

| R+M Nr.     | ∅      | ⊗       | P            | incl.   |
|-------------|--------|---------|--------------|---------|
| 521 075 300 | 750 mm | 1/4" F  | max. 275 bar | -       |
| 521 075 301 | 750 mm | 3/8" F  | max. 275 bar | ST-2600 |
| 521 075 302 | 750 mm | M22 F   | max. 275 bar | -       |
| 521 075 303 | 750 mm | Plug KW | max. 275 bar | -       |

## Floor cleaner heart shape



ST-2605

**LTF**

We recommend using the gun ST-2605 with patented LTF technology.

1.200 mm

## turbodevil

- » High-quality stainless steel version with lance holder at the push handle
- » **Working width 1,200 mm**
- » 3 variable rotary swivel bars with two spray nozzles each
- » 2 big industrial castors ∅ 380 mm and 1 double guide roll ∅ 160 mm
- » The integrated screen filter prevents that the nozzles get clogged
- » 6 nozzles 1/4" M BSP are required
- » Min. 150 bar / max. 350 bar
- » Min. 30 l/min. / max. 60 l/min.
- » Max. 90 °C



| R+M Nr.     | ⊗      | ⊗ | P                           | °C  | ⊗     |
|-------------|--------|---|-----------------------------|-----|-------|
| 710 100 122 | 1/4" F |   | min. 150 bar / max. 350 bar | 90° | 44 kg |

Symbols ∅ diameter ⊗ weight ⊗ inlet P pressure D nozzle