

Foodjet - food hose

Foodjet - Food hose according to EN 854. Particularly resistant to animal and poultry fats

- » Field of application: cleaning hose designed for the food industry
- » Suitable for: oil, water, water-in-oil emulsion and water mixes with up to 50 % detergent
- » Surface synthetic rubber. Particularly abrasion-, oil-, ozone-resistant,

weatherproof and food safe

- » Interior synthetic, oil-resistant rubber
- » 2 tight textile meshwork
- » Max. 80 bar. Burst pressure > 240 bar.
- 40 °C - +150 °C

Female thread DKR


Male thread (AGR)

Male thread (AGR) : DKR

Foodjet per metre

1/2" : 1/2"

DN 12

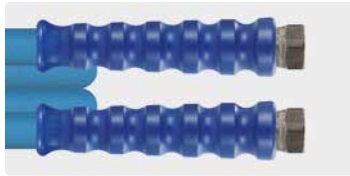

Fittings stainless steel

Fittings stainless steel

Fittings stainless steel

R+M Nr.	↔	
490 056 002 59	2.5 m	
490 056 010 9	10.0 m	
490 056 015 9	15.0 m	
490 056 020 9	20.0 m	
490 056 025 9	25.0 m	
490 056 030 9	30.0 m	
490 056 035 9	35.0 m	
490 056 040 9	40.0 m	

R+M Nr.	↔	
490 046 002 59	2.5 m	
490 046 010 9	10.0 m	
490 046 015 9	15.0 m	
490 046 020 9	20.0 m	
490 046 025 9	25.0 m	
490 046 030 9	30.0 m	
490 046 035 9	35.0 m	
490 046 040 9	40.0 m	

R+M Nr.	↔	
490 057 002 59	2.5 m	
490 057 610 9	10.0 m	
490 057 615 9	15.0 m	
490 057 620 9	20.0 m	
490 057 625 9	25.0 m	
490 057 630 9	30.0 m	
490 057 635 9	35.0 m	
490 057 640 9	40.0 m	

R+M Nr.	↔	
303 60		10 - 95 m

blufood® - food hose

blufood® - Food hose according to (EC)2002/72, (EU) 10/2011, (EG) 1935/2004 and (EG) 2023/2006. Designed for industrial foam applications

- » Field of application: foam hose and pre-spraying hose in the food industry. Suitable for contact with liquid food products
- » Suitable for water and water mixes of usual cleaning detergents
- » PVC hose with five layers and a smooth surface

- » Reinforcing by twofold textile meshwork
- » -20 °C - +70 °C

Female thread DKR

Male thread (AGR)

ST-3100 Coupling : Plug

Screw fittings for blufood®

1/2" : 1/2"



1/2" M with 60° cone. Stainless steel. Max. 50 bar

R+M Nr.	↔	DN
329 012 129		12

Fittings stainless steel

Fittings stainless steel

Coupling ST-3100 : plug ST-3100



1/2" F with 60° cone. Stainless steel. Max. 50 bar

R+M Nr.	↔	DN
329 112 129		12

R+M Nr.	↔	
475 056 602 59	2.5 m	
475 056 610 9	10.0 m	
475 056 615 9	15.0 m	
475 056 620 9	20.0 m	
475 056 625 9	25.0 m	
475 056 630 9	30.0 m	
475 056 635 9	35.0 m	
475 056 640 9	40.0 m	

R+M Nr.	↔	
475 046 602 59	2.5 m	
475 046 610 9	10.0 m	
475 046 615 9	15.0 m	
475 046 620 9	20.0 m	
475 046 625 9	25.0 m	
475 046 630 9	30.0 m	
475 046 635 9	35.0 m	
475 046 640 9	40.0 m	

R+M Nr.	↔	
475 012 262 09	20 m	
475 012 262 59	25 m	
475 012 263 09	30 m	



1/2" F. Stainless steel. Max. 50 bar. Flat sealing

R+M Nr.	↔	DN
329 312 129		12

blufood® per metre

R+M Nr.	DN	↔	Ⓝ	P 20 °C	P 70 °C	BP 20 °C	Ⓢ
303 70	12	10-100 m	5	50 bar	30 bar	≥ 240 bar	0.32 kg
303 700 019	19	10-60 m	6	40 bar	15 bar	≥ 200 bar	0.61 kg

Made out of plastics intended to come into contact with foodstuffs according to Regulation (EC) No. 1935/2004. Especially designed for applications in the food industry.

