

easyfoam365+ injectors by Suttner

Injectors ST-160



3/8" F : 3/8" M : hose tail 9 mm. Injector for applications with chemicals and foam. The chemical dosing is adjusted by 8 exchangeable nozzle inserts (0.5 - 1.5 mm).
Max. 350 bar / 90 °C

R+M Nr.	D
200 160 499	1.2 mm
200 160 500	1.3 mm
200 160 505	1.4 mm
200 160 510	1.5 mm
200 160 515	1.6 mm
200 160 520	1.7 mm
200 160 525	1.8 mm
200 160 530	1.9 mm
200 160 540	2.1 mm
200 160 550	2.3 mm
200 160 575	2.8 mm



3/8" F : 3/8" M : hose tail 9 mm. Injector ST-160 with metering valve ST-161.
Max. 350 bar / 90 °C

R+M Nr.	D
200 160 599	1.1 mm
200 160 600	1.2 mm
200 160 601	1.3 mm
200 160 602	1.4 mm
200 160 603	1.5 mm
200 160 604	1.6 mm
200 160 605	1.7 mm
200 160 606	1.8 mm
200 160 607	1.9 mm
200 160 609	2.1 mm
200 160 611	2.3 mm
200 160 614	2.8 mm

Injectors ST-166




3/8" F : 3/8" M : 2 hose tails 9 mm. Injector for applications with chemicals and foam. The injector sucks in/admixes up to two chemicals at the same time. The chemical dosing is adjusted by 2 x 8 exchangeable nozzle inserts (0.5 - 1.5 mm).
Max. 350 bar / 90 °C

R+M Nr.	D
200 166 500	1.3 mm
200 166 510	1.6 mm
200 166 530	1.9 mm

new

Valve lock

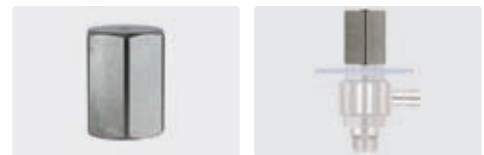

Valve lock for metering valve ST-161

R+M Nr.
040 003 566



Coupling ST-45-250 stainless steel : plug ST-45-250 stainless steel. Injector with suction hose 2000 mm and suction filter ST-31. The chemical dosing is adjusted by 8 exchangeable nozzle inserts (0.5 - 1.5 mm).
Max. 250 bar / 90 °C

R+M Nr.	D
200 160 819	1.6 mm
200 160 820	1.7 mm
200 160 821	1.8 mm
200 160 822	1.9 mm
200 160 823	2.0 mm
200 160 824	2.1 mm
200 160 825	2.2 mm
200 160 826	2.3 mm



Coupling ST-45-250 nickel-plated brass : plug ST-45-250 zinc-plated steel. Injector with suction hose 2000 mm and suction filter ST-31. The chemical dosing is adjusted by 8 exchangeable nozzle inserts (0.5 - 1.5 mm).
Max. 250 bar / 90 °C

R+M Nr.	D
200 160 834	1.6 mm
200 160 835	1.7 mm
200 160 836	1.8 mm
200 160 837	1.9 mm
200 160 838	2.0 mm
200 160 839	2.1 mm
200 160 840	2.2 mm
200 160 841	2.3 mm



M22 F : M22 M. Injector with suction hose 2000 mm and suction filter ST-31. The chemical dosing is adjusted by 8 exchangeable nozzle inserts (0.5 - 1.5 mm).
Max. 350 bar / 90 °C

R+M Nr.	D
200 160 752	1.6 mm
200 160 755	1.7 mm
200 160 756	1.8 mm
200 160 757	1.9 mm
200 160 758	2.0 mm
200 160 759	2.1 mm
200 160 760	2.2 mm
200 160 761	2.3 mm