

PURClean365+® - food hose

PURClean365+® 40

Female thread DKR 1/2"

-20 °C - +70 °C. Fittings stainless steel



R+M Nr.	↔	Length
476 456 202 59	↔	2.5 m
476 456 210 9	↔	10.0 m
476 456 215 9	↔	15.0 m
476 456 220 9	↔	20.0 m
476 456 225 9	↔	25.0 m
476 456 230 9	↔	30.0 m
476 456 235 9	↔	35.0 m
476 456 240 9	↔	40.0 m

Male thread (AGR) 1/2"



R+M Nr.	↔	Length
476 446 202 59	↔	2.5 m
476 446 210 9	↔	10.0 m
476 446 215 9	↔	15.0 m
476 446 220 9	↔	20.0 m
476 446 225 9	↔	25.0 m
476 446 230 9	↔	30.0 m
476 446 235 9	↔	35.0 m
476 446 240 9	↔	40.0 m

Female thread DKR 1/2"

-20 °C - +70 °C. Fittings stainless steel



R+M Nr.	↔	Length
476 256 702 59	↔	2.5 m
476 256 710 9	↔	10.0 m
476 256 715 9	↔	15.0 m
476 256 720 9	↔	20.0 m
476 256 725 9	↔	25.0 m
476 256 730 9	↔	30.0 m
476 256 735 9	↔	35.0 m
476 256 740 9	↔	40.0 m

Male thread (AGR) 1/2"



R+M Nr.	↔	Length
476 246 702 59	↔	2.5 m
476 246 710 9	↔	10.0 m
476 246 715 9	↔	15.0 m
476 246 720 9	↔	20.0 m
476 246 725 9	↔	25.0 m
476 246 730 9	↔	30.0 m
476 246 735 9	↔	35.0 m
476 246 740 9	↔	40.0 m


PURClean365+® 40 per metre

R+M Nr.	DN	↔	W	P 20 °C	P 70 °C	BP 20 °C	⊠
303 660 42	12	10 - 100 m	4.5	100 bar	45 bar	≥ 250 bar	0.25 kg

PURClean365+® 40 per metre


R+M Nr.	DN	↔	W	P 20 °C	P 70 °C	BP 20 °C	⊠
303 660 43	12	10 - 100 m	4.5	100 bar	45 bar	≥ 250 bar	0.25 kg

Screw fittings for PURClean365+®




1/2" M with 60° cone. Stainless steel.
Max. 50 bar

R+M Nr.	DN
329 412 129	12



1/2" F with 60° cone. Stainless steel.
Max. 50 bar

R+M Nr.	DN
329 512 129	12

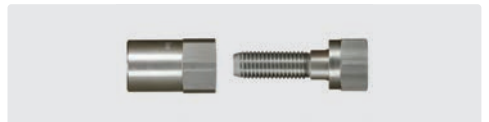

1/2" F. Stainless steel. Max. 50 bar. Flat sealing

R+M Nr.	DN
329 612 129	12

PURClean365+® - 40 food hoses with the professional flat ST-3225

Food Special SET

Professional ST-3225 gun with progressive closing system and coupling ST-3100. Inlet 1/2" F swivel. Stainless steel. Max. 24.5 bar or 60 bar. Max. 120 l/min / 100 °C. with PURClean365+ 40 food hose 1/2" male thread AGR. 45 bar working pressure at 70 °C

ST-3225 / PURClean365+ 40 blue



R+M Nr.	ST-3225 P	↔	Length
476 046 620 91	↔	24.5 bar	20 m
476 046 625 91	↔	24.5 bar	25 m
476 046 630 91	↔	24.5 bar	30 m
476 046 620 92	↔	60 bar	20 m
476 046 625 92	↔	60 bar	25 m
476 046 630 92	↔	60 bar	30 m

ST-3225 / PURClean365+ 40 yellow



R+M Nr.	ST-3225 P	↔	Length
476 346 420 91	↔	24.5 bar	20 m
476 346 425 91	↔	24.5 bar	25 m
476 346 430 91	↔	24.5 bar	30 m
476 346 420 92	↔	60 bar	20 m
476 346 425 92	↔	60 bar	25 m
476 346 430 92	↔	60 bar	30 m

ST-3225 / PURClean365+ 40 green



R+M Nr.	ST-3225 P	↔	Length
476 446 220 91	↔	24.5 bar	20 m
476 446 225 91	↔	24.5 bar	25 m
476 446 230 91	↔	24.5 bar	30 m
476 446 220 92	↔	60 bar	20 m
476 446 225 92	↔	60 bar	25 m
476 446 230 92	↔	60 bar	30 m

ST-3225 / PURClean365+ 40 red



R+M Nr.	ST-3225 P	↔	Length
476 246 720 91	↔	24.5 bar	20 m
476 246 725 91	↔	24.5 bar	25 m
476 246 730 91	↔	24.5 bar	30 m
476 246 720 92	↔	60 bar	20 m
476 246 725 92	↔	60 bar	25 m
476 246 730 92	↔	60 bar	30 m

new