

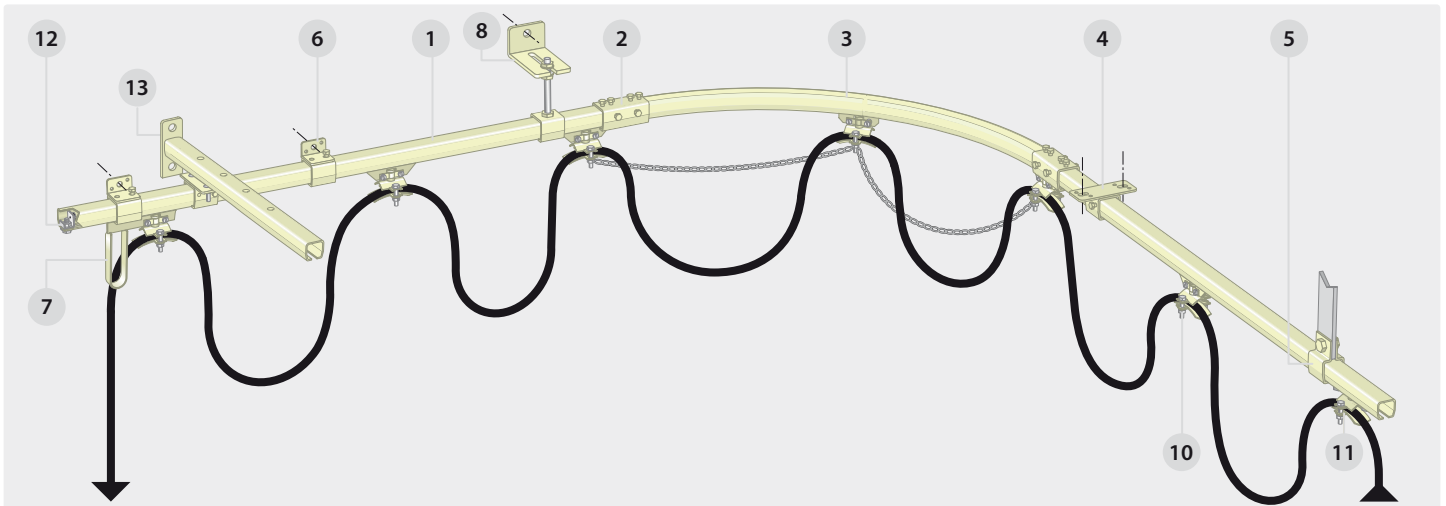
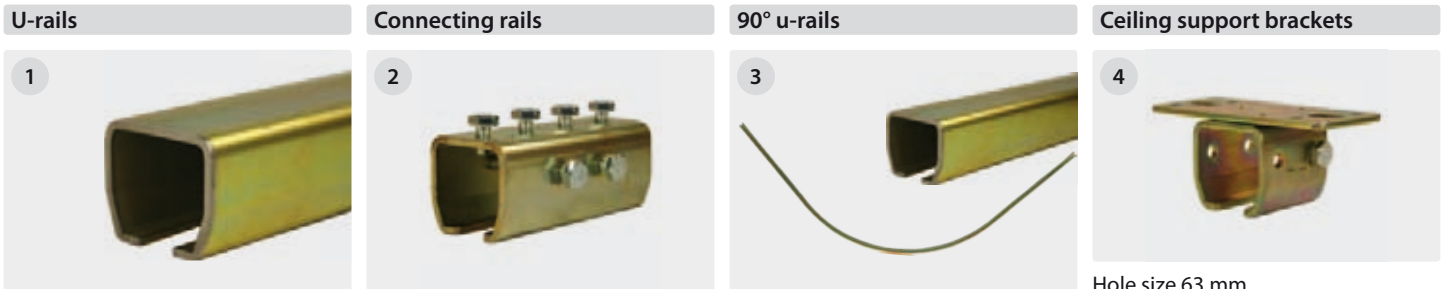


Hose guide system . zinc-plated steel . 30 mm profile

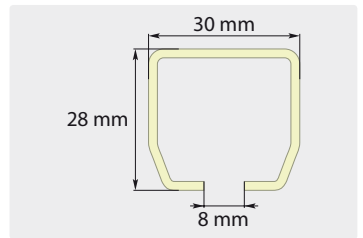

In case of angle installation it is recommended to connect the trolleys with a chain.

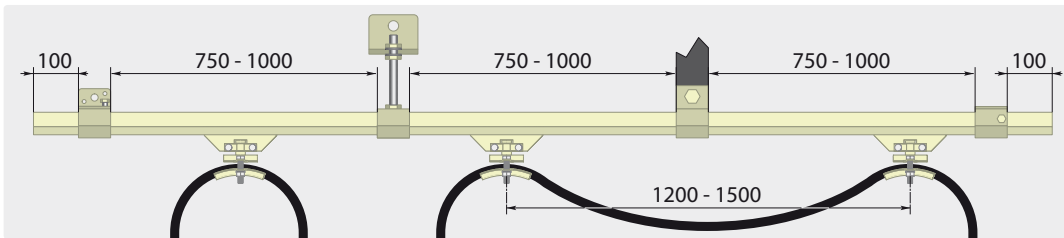

U-rails	R+M Nr.	Length
1	107 008 0	6 m

Connecting rails	R+M Nr.	Length
2	107 208 0	80 mm

90° u-rails	R+M Nr.	radius
3	107 508 0	650 mm

Ceiling support brackets	R+M Nr.	Hole size
4	107 608 0	40 mm



Mount base for flat iron	R+M Nr.	Length
5	107 908 0	40 mm




Wall mount base	R+M Nr.	Length
6	107 108 0	40 mm



2 Hammer head screws. Steel.

Mounting brackets	R+M Nr.	Length
1	107 901 0	300 mm
2	107 902 1	VPE = 50
4	107 608 0	40 mm

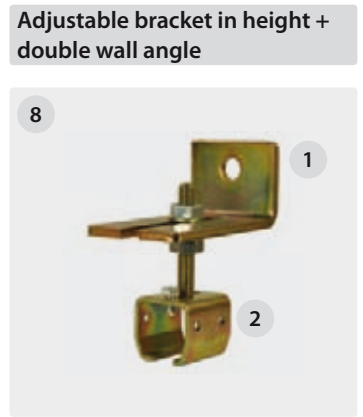

Adjustable bracket in height + double wall angle	R+M Nr.	Angle length
8	107 808 1	100 mm
	107 808 2	1

Please use the hose guide system made out of stainless steel in case of saline conditions!