

Hose guide system . zinc-plated steel . 30 mm profile


Attachment trolleys



Weight max. 10 kg

R+M Nr.	outer \varnothing
107 308 07	8 - 15 mm
107 308 06	16 - 24 mm


Twin hose trolleys

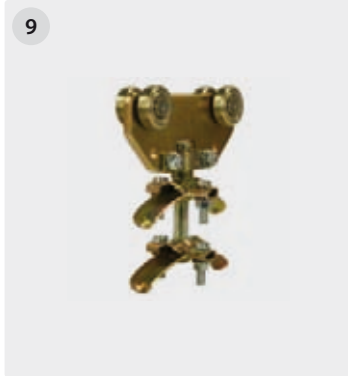

Weight max. 10 kg

R+M Nr.	outer \varnothing
107 308 012	8 - 15 mm
107 308 002	16 - 24 mm

Hose trolleys

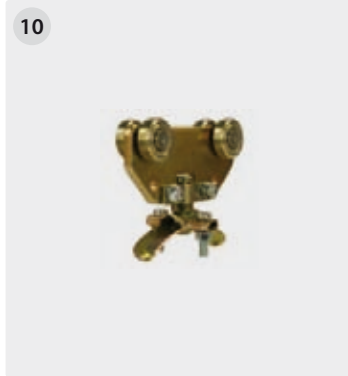

Weight max. 10 kg

R+M Nr.	outer \varnothing
107 308 01	8 - 15 mm
107 308 0	16 - 24 mm

End clamps



Weight max. 10 kg

R+M Nr.	outer \varnothing
107 708 01	8 - 15 mm
107 708 0	16 - 24 mm

Bumpers



R+M Nr.
107 408 0

Hose guide system . stainless steel V2A / AISI 304 . 30 mm profile

U-rails



R+M Nr.	length
107 008 09	6 m

Mounting brackets



2 Hammer head screws. Stainl. steel

R+M Nr.	length
107 901 9 1	300 mm
107 902 8 2	VPE = 50
107 608 09 4	40 mm

Connecting rails



R+M Nr.
107 208 09

Ceiling support brackets



Hole size 63 mm

R+M Nr.	length
107 608 09	40 mm

Adjustable bracket in height + double wall angle



Angle length 100 mm

R+M Nr.	type
107 808 19 1	angle
107 808 29 2	sleeve

Attachment trolleys



Suitable for hoses up to 24 mm

R+M Nr.
107 308 069

Hose trolleys



Suitable for hoses up to 24 mm

R+M Nr.
107 308 09

Hose end clamps



Suitable for hoses up to 24 mm

R+M Nr.
107 708 09

Bumpers



R+M Nr.
107 408 09

Symbols \varnothing weight TYP type VPE packing unit DN nominal diameter P pressure length * colour \odot inlet \ominus outlet shipment by truck