


**Inox automatic hose reels**


- » Base frame stain. steel V2A / AISI 304. Reel made out of especially impact-resistant ABS plastic which is usually used for the manufacture of motorcycle helmets and in the automotive industry.
- » Due to the high quality construction of the automatic spring-driven high pressure hose reels they are suitable for applications in service stations, garages, in the agriculture and in the building industry etc.
- » The automatic hose reels are easy to install in every place such as wall, ceiling, vehicle etc. An optionally available wall bracket enables an easy mounting of the hose reel.

- » All models offer a traction release. A quick pull unmakes the locking device.
- » The hose reels are all equipped with a swivel ST-322. The swivels ST-322 are completely made out of stainless steel and have a ring as sealing element.
- » Due to the processed materials the hose reels are unhesitatingly suitable for the mediums water, water with cleaning detergent, oils, greases and air.
- » They are suitable for a working pressure of max. 300 bar and a temperature of max. 90 °C.

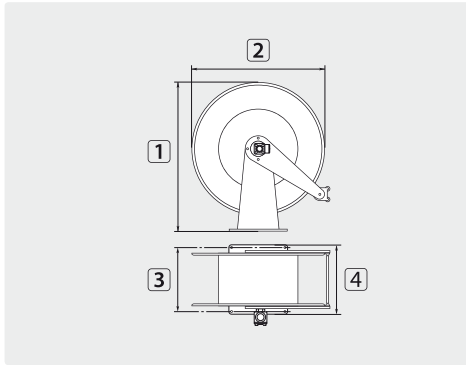


| TYP | outer $\varnothing$ = hose $\leftrightarrow$ |
|-----|--|
| 05  | 17.0 mm = 21 m                               |
| 05  | 19.5 mm = 16 m                               |
| 05  | 22.0 mm = 14 m                               |

| R+M Nr.    | C      | ★ | ⊕      | ⊖                   | DN | P       | °C    | ⊗       | 1      | 2      | 3      | 4      | TYP |
|------------|--------|---|--------|---------------------|----|---------|-------|---------|--------|--------|--------|--------|-----|
| 764 434 30 | yellow | ● | 1/2" F | 1/2" F              | 10 | 300 bar | 90 °C | 14.0 kg | 460 mm | 420 mm | 140 mm | 186 mm | 05  |
| 764 434 32 | yellow | ● | M22 M  | plug coupling 11 mm | 10 | 300 bar | 90 °C | 14.0 kg | 460 mm | 420 mm | 140 mm | 186 mm | 05  |
| 764 434 34 | yellow | ● | M22 M  | M22 M               | 10 | 300 bar | 90 °C | 14.0 kg | 460 mm | 420 mm | 140 mm | 186 mm | 05  |

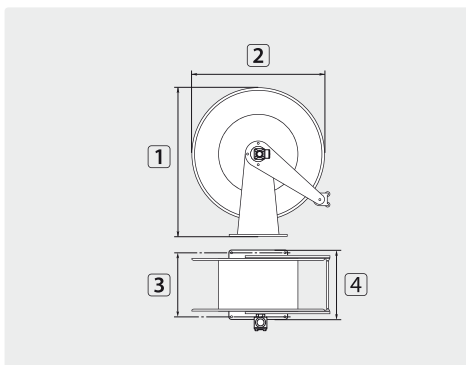

| TYP | outer $\varnothing$ = hose $\leftrightarrow$ |
|-----|--|
| 05  | 17.0 mm = 21 m                               |
| 05  | 19.5 mm = 16 m                               |
| 05  | 22.0 mm = 14 m                               |

| R+M Nr.    | C    | ★ | ⊕      | ⊖                   | DN | P       | °C    | ⊗       | 1      | 2      | 3      | 4      | TYP |
|------------|------|---|--------|---------------------|----|---------|-------|---------|--------|--------|--------|--------|-----|
| 764 434 31 | grey | ● | 1/2" F | 1/2" F              | 10 | 300 bar | 90 °C | 14.0 kg | 460 mm | 420 mm | 140 mm | 186 mm | 05  |
| 764 434 33 | grey | ● | M22 M  | plug coupling 11 mm | 10 | 300 bar | 90 °C | 14.0 kg | 460 mm | 420 mm | 140 mm | 186 mm | 05  |
| 764 434 35 | grey | ● | M22 M  | M22 M               | 10 | 300 bar | 90 °C | 14.0 kg | 460 mm | 420 mm | 140 mm | 186 mm | 05  |

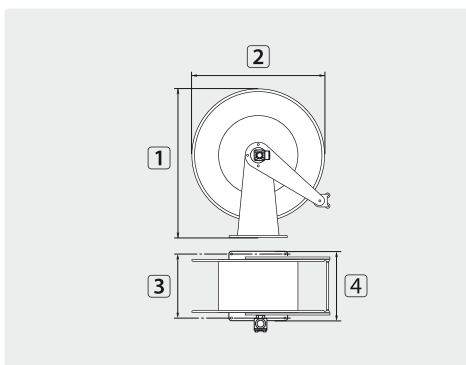

| TYP | outer $\varnothing$ = hose $\leftrightarrow$ |
|-----|--|
| 05  | 17.0 mm = 21 m                               |
| 05  | 19.5 mm = 16 m                               |
| 05  | 22.0 mm = 14 m                               |

| R+M Nr.    | C     | ★ | ⊕      | ⊖                   | DN | P       | °C    | ⊗       | 1      | 2      | 3      | 4      | TYP |
|------------|-------|---|--------|---------------------|----|---------|-------|---------|--------|--------|--------|--------|-----|
| 764 434 36 | black | ● | 1/2" F | 1/2" F              | 10 | 300 bar | 90 °C | 14.0 kg | 460 mm | 420 mm | 140 mm | 186 mm | 05  |
| 764 434 37 | black | ● | M22 M  | plug coupling 11 mm | 10 | 300 bar | 90 °C | 14.0 kg | 460 mm | 420 mm | 140 mm | 186 mm | 05  |
| 764 434 38 | black | ● | M22 M  | M22 M               | 10 | 300 bar | 90 °C | 14.0 kg | 460 mm | 420 mm | 140 mm | 186 mm | 05  |