


## High pressure solenoid valves closed in off-position


### Danfoss VDHT

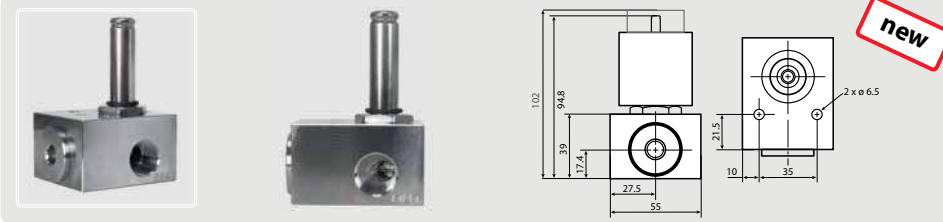

Stainless steel. Viton. Pressure range 0 - 160 bar. Without coil. Max. 90 °C

R+M Nr.	⊙	⊖
837 180 094	1/2"	60 l/min
837 180 092	3/8"	30 l/min

### Danfoss solenoid coil

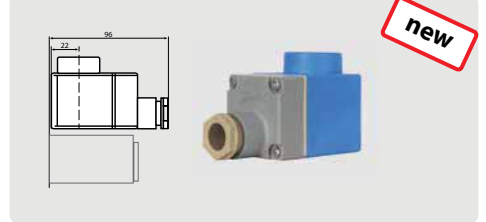

24 V / DC / 13 W

R+M Nr.
837 018 791 4

### Rapa SV 04



1/4" F. NW 1.5 mm. Solenoid valve with connector. Pressure range 0 - 130 bar. Max. 90 °C

R+M Nr.	V
832 01	24 V =
832 00	24 V ~ 50 Hz
832 10	230 V ~ 50 Hz

### AK



1/4" F. NW 1.2 mm. Solenoid valve without connector. Pressure range 0 - 180 bar. Max. 90 °C

R+M Nr.	↔	⊖	V
833 10	48 mm	109 mm	24 V =
833 15	48 mm	109 mm	24 V ~ 50 Hz
833 00	48 mm	109 mm	230 V ~ 50 Hz

### Connector




R+M Nr.
833 50

## Distributor connector block



Stainless steel. 4 connections.  
H x W x D: 36 x 243 x 40 mm. 390 g.  
Max. 10 bar. 150 °C

R+M Nr.	4 x ⊙	⊕	⊖
725 041 012	1/2" F	1" F	1" F

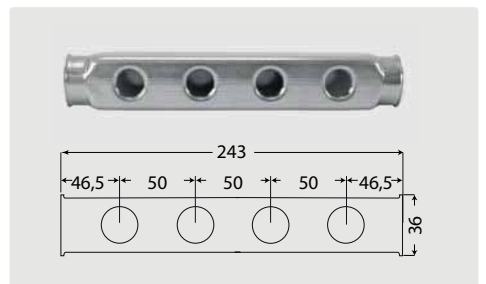

Symbols ⊕ inlet ⊖ outlet P pressure ⊙ diameter