

Vannes by-pass THP

VB60/600 ZERO



☉ = entrée 1/2" F. ☺ = sortie 1/2" F.
 BP = by-pass 1/2" F.
 Max. 600 bar / 90 °C

R+M Nr.	☉	☺
532 260 0	60 l/min	

H560



Inox. BP = by-pass 1/2" F. MN = manomètre 1/4" F.

Max. 500 bar / 80 °C / 60 l/min

R+M Nr.	☉	☺
100 005 60	1/2" F	1/2" F

BKX



BP = by-pass 3/4" F.
 Max. 600 bar / 80 °C / 60 l/min

R+M Nr.	☉	☺
010 000 02	1/2" F	1/2" F

VB60/600 ZERO



☉ = entrée 1/2" F. ☺ = sortie 1/2" F.
 BP = by-pass 1/2" F. Vanne by-pass avec pressostat (IP55) et câble 950 mm.

Max. 600 bar / 90 °C

R+M Nr.	☉
532 265 0	60 l/min

Soupapes de sécurité THP

VS 500



☉ 222 mm. Max. 500 bar

R+M Nr.	BP	☉
532 520 0	3/8" F	1/2" F

S3




☉ 110 mm. Max. 700 bar

R+M Nr.	☉
010 002 15	1/2" M

ST-230-700, soupape de sécurité

plombage possible

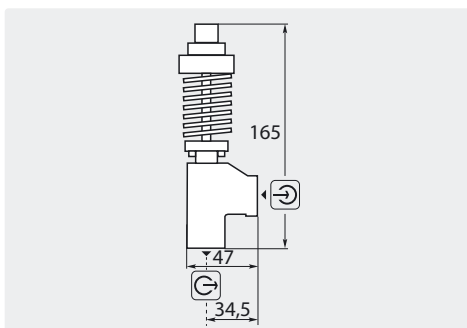


☉ 165 mm. Max. 40 l/min / 60 °C.

En pointe max. 85 °C

R+M Nr.	☉	☉	P
200 230 700	3/8" F	1/4" F	200-700

Brise jet

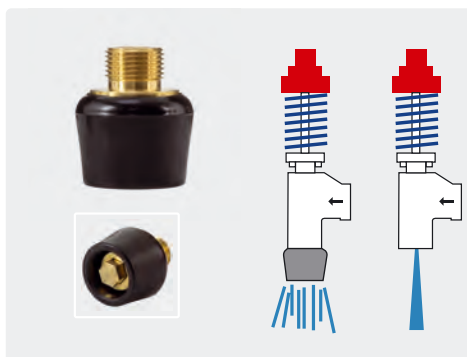


☉ 27 mm

R+M Nr.	☉
200 230 410	3/8" M

ST-220

plombage possible

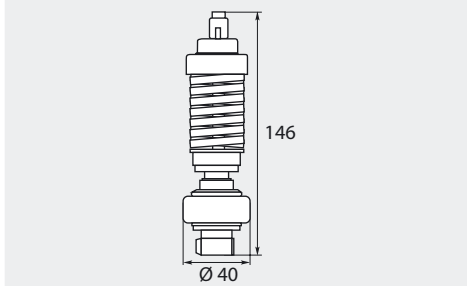

☉ 146 mm. Max. 700 bar / 50 l/min / 85 °C

R+M Nr.	☉
200 220 500	1/2" M

