


## easywash365+ car wash ceiling booms

## easywash365+ standard



Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Max. 275 bar / 90 °C.

R+M Nr.	↔	Ⓒ	Ⓓ	Ⓔ
109 766 954	1750 mm	1/4" F	1/4" M	8.0 kg

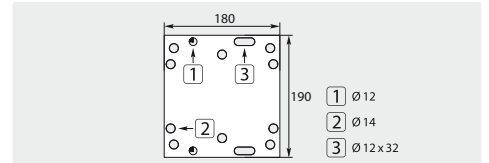


## easywash365+ double ceiling booms



Stainless steel. Ready for installation with three integrated swivels, professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially developed for 2 different application mediums. Max. 275 bar / 90 °C

R+M Nr.	↔	Ⓒ	Ⓓ	Ⓔ
109 767 921	1600 mm / 1750 mm	1/4" F	1/4" M	13.5 kg

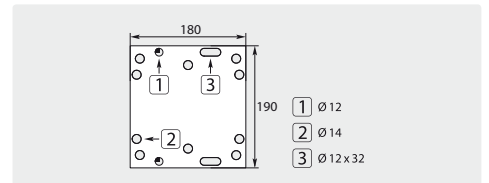

Symbols ↔ length Ⓒ inlet Ⓓ outlet Ⓔ weight Ⓕ diameter