


## easywash365+ car wash ceiling booms with suspension

### easywash365+ standard



Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Max. 275 bar / 90 °C.

| R+M Nr.     | ↔        | ⊕      | ⊖      | ⊞      |
|-------------|----------|--------|--------|--------|
| 109 766 972 | 1,750 mm | 1/4" F | 1/4" M | 8.0 kg |




### easywash365+ car wash ceiling boom-Z








Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially designed for using two booms side by side. Max. 275 bar / 90 °C

| R+M Nr.     | ↔        | ⊕      | ⊖      | ⊞      |
|-------------|----------|--------|--------|--------|
| 109 765 978 | 1,550 mm | 1/4" F | 1/4" M | 8.0 kg |



Mounting example for ceiling boom-Z

- A = 4,600 mm
- B = 900 mm
- C = 1,500 mm
- D = 750 mm
- L = 1,550 mm

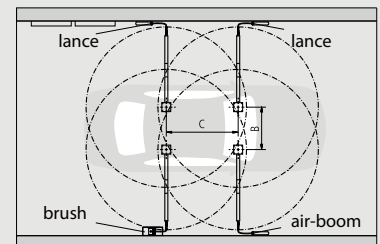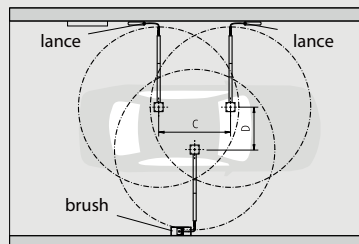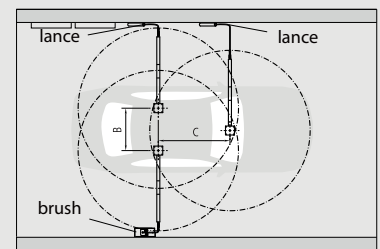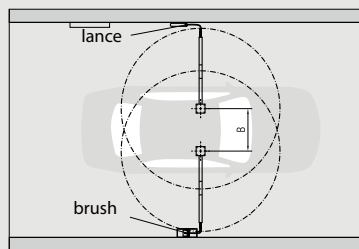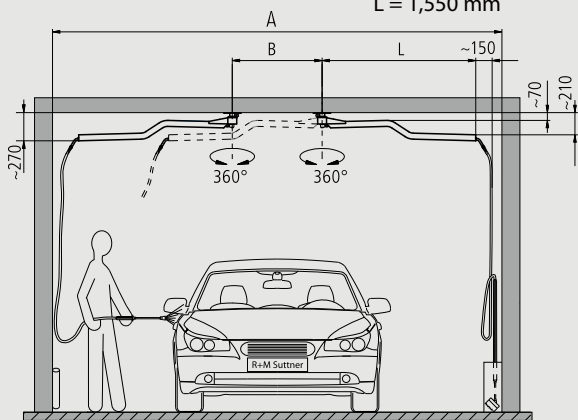

Symbols ⊕ diameter ⊕ inlet ⊖ outlet ⊞ weight ↔ length